



 **Summit**
tires



PASSENGER & LIGHT TRUCK TIRES
SUMMITTIREUSA.COM





TABLE OF CONTENTS

4	ULTRAMAX A/S 2.0
5	ULTRAMAX UHP AS
6	ULTRAMAX 4S
7	TRAIL CLIMBER SUV²
8	TRAIL CLIMBER HT03
9	TRAIL CLIMBER AT02
10	TRAIL CLIMBER RT
11	ULTRAMAX WINTER PRO
12	TRAIL CLIMBER LMD
13	HI ROAD ST








ULTRAMAX A/S 2.0

Size	PART#	LI/SR	L.R.	TD	OD	SW	RW	UTQG	MAX LOAD
					32/in.	in.	in.	in.	lbs@psi (1X)
175/65R14	20645	86T	XL	10	23.0	7.0	5.0	420 A A	1168@50
175/70R14	20640	84T		10	23.7	7.0	5.0	420 A A	1102@44
185/65R14	20629	86H		10	23.5	7.4	5.5	420 A A	1168@44
195/70R14	20637	91T		10	24.8	7.9	6.0	420 A A	1356@44
175/55R15	20660	77H		10	22.6	7.2	5.5	420 A A	908@44
175/65R15	20653	84H		10	24.0	7.0	5.0	420 A A	1102@44
185/55R15	20639	82V		10	23.0	7.6	6.0	420 A A	1047@44
185/60R15	20627	88H	XL	10	23.7	7.4	5.5	420 A A	1235@50
185/65R15	20621	92H	XL	10	24.4	7.4	5.5	420 A A	1389@50
195/60R15	20623	88H		10	24.2	7.9	6.0	420 A A	1235@44
195/65R15	20614	91H		10	25.0	7.9	6.0	420 A A	1356@44
205/60R15	20646	95H	XL	10	24.7	8.2	6.0	420 A A	1521@50
205/65R15	20624	94H		10	25.5	8.2	6.0	420 A A	1477@44
205/70R15	20635	96T		10	26.3	8.2	6.0	420 A A	1565@44
215/70R15	20628	98T		10	26.9	8.7	6.5	420 A A	1653@44
195/50R16	20654	84V		10	23.7	7.9	6.0	420 A A	1102@44
195/55R16	20652	87H		10	24.4	7.9	6.0	420 A A	1201@44
205/50R16	20648	87H		10	24.1	8.4	6.5	420 A A	1201@44
205/55R16	20611	91H		10	24.9	8.4	6.5	420 A A	1356@44
205/60R16	20620	92H		10	25.7	8.2	6.0	420 A A	1389@44
205/65R16	20619	95H		10	26.5	8.2	6.0	420 A A	1521@44
215/55R16	20622	97H	XL	10	25.3	8.9	7.0	420 A A	1609@50
215/60R16	20613	95H		10	26.1	8.7	6.5	420 A A	1521@44
215/65R16	20626	98T		10	27.0	8.7	6.5	420 A A	1653@44
225/60R16	20617	98H		10	26.6	9.0	6.5	420 A A	1653@44
225/65R16	20636	100H		10	27.5	9.0	6.5	420 A A	1764@44
235/60R16	20659	100V		10	27.1	9.4	7.0	420 A A	1764@44
235/65R16	20647	103T		10	28.0	9.4	7.0	420 A A	1929@44
205/50R17	20641	89V		10	25.1	8.4	6.5	420 A A	1728@44
215/45R17	20649	87W		10	24.6	8.4	7.0	420 A A	1201@44
215/50R17	20642	91V		10	25.5	8.9	7.0	420 A A	1356@44
215/55R17	20612	94V		10	26.3	8.9	7.0	420 A A	1477@44
215/60R17	20632	96T		10	27.2	8.7	6.5	420 A A	1565@44
215/65R17	20634	99T		10	28.0	8.7	6.5	420 A A	1709@44
225/45R17	20631	91V		10	25.0	8.9	7.5	420 A A	1356@44
225/50R17	20616	94V		10	25.9	9.2	7.0	420 A A	1477@44
225/55R17	20618	97V		10	26.8	9.2	7.0	420 A A	1609@44
225/60R17	20625	99H		10	27.6	9.0	6.5	420 A A	1709@44
225/65R17	10176	102T		10	28.5	9.0	6.5	420 A A	1874@44
235/45R17	20651	97W	XL	10	25.4	9.3	8.0	420 A A	1609@50
235/55R17	20644	99V		10	27.2	9.6	7.5	420 A A	1709@44
225/40R18	20658	92W	XL	10	25.1	9.1	8.0	420 A A	1389@50
225/50R18	20643	95H		10	26.9	9.2	7.0	420 A A	1521@44
235/45R18	20650	94V		10	26.3	9.3	8.0	420 A A	1477@44
235/50R18	20638	97V		10	27.3	9.6	7.5	420 A A	1609@44
235/55R18	20630	100V		10	28.1	9.6	7.5	420 A A	1764@44
235/60R18	20633	103H		10	29.1	9.4	7.0	420 A A	1929@44
245/40R18	20657	97W	XL	10	25.7	9.8	8.5	420 A A	1609@50
245/45R18	20656	100W	XL	10	26.7	9.6	8.0	420 A A	1764@50
235/55R19	20655	105V	XL	10	29.2	9.6	7.5	420 A A	2039@50

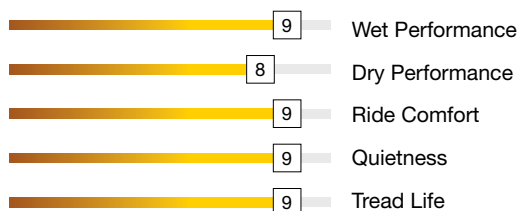

60,000 Mile Limited Treadwear Warranty

The ULTRAMAX A/S 2.0 is an exceptional all-season tire with the perfect balance of comfort and performance. Full-size offering with needed speed ratings from T to W for today's vehicles. Its design features four broad circumferential grooves, ensuring excellent wet traction. The wide footprint and notched center rib enhance stability and traction. ULTRAMAX A/S 2.0 guarantees both comfort and performance, coupled with a 60,000-mile tread life, ensuring peace of mind in all seasons.

TIRE FEATURES


- **BALANCED VARIABLE PITCH TREAD DESIGN:** Reduces road noise and assures a quiet comfortable cabin.
- **FULL-SIPED INNER TREAD BLOCKS:** Efficient water evacuation design promotes enhanced wet performance.
- **CENTER RIB WITH ANGLED SIPES:** Enhances traction while improving straight-line stability.





ULTRAMAX UHP AS

Size	PART#	LI/SR	L.R.	TD	OD	SW	RW	UTQG	MAX LOAD
					32/in.	in.	in.		lbs@psi (1X)
205/45R16	1601662	87W	XL	10	23.0	8.1	7.0	600 A A	1201@50
205/50R16	1601663	87W	SL	10	23.9	8.4	6.5	600 A A	1201@44
205/55R16	1601675	91W	SL	10	24.8	8.4	6.5	600 A A	1356@44
215/55R16	1601681	97W	XL	10	25.1	8.9	7.0	600 A A	1609@50
235/45R17	1601644	97W	XL	10	25.4	9.3	8.0	600 A A	1609@50
245/40R17	1601648	95V	XL	10	24.7	9.8	8.5	600 A A	1521@50
245/45R17	1601649	99W	XL	10	25.7	9.6	8.0	600 A A	1709@50
225/45R17	1601651	91V	SL	10	25.0	8.9	7.5	600 A A	1356@44
235/50R17	1601657	100W	XL	10	26.3	9.7	7.5	600 A A	1764@50
235/55R17	1601658	103W	XL	10	27.2	9.7	7.5	600 A A	1929@50
225/55R17	1601669	101W	XL	10	26.8	9.2	7.0	600 A A	1819@50
225/50R17	1601673	98V	XL	10	25.9	9.2	7.0	600 A A	1653@50
205/45R17	1601674	88W	XL	10	24.1	8.1	7.0	600 A A	1235@50
215/45R17	1601676	91W	XL	10	24.5	8.4	7.0	600 A A	1356@50
215/50R17	1601678	91V	SL	10	25.4	8.9	7.0	600 A A	1356@44
215/55R17	1601679	98W	XL	10	26.1	8.9	7.0	600 A A	1653@50
205/50R17	1601680	93W	XL	10	25.0	8.4	6.5	600 A A	1433@50
225/55R18	1601634	102W	XL	10	27.8	9.2	7.0	600 A A	1874@50
235/50R18	1601645	97W	SL	10	27.3	9.7	7.5	600 A A	1609@44
245/45R18	1601650	100W	XL	10	26.7	9.6	8.0	600 A A	1764@50
235/55R18	1601653	104W	XL	10	28.2	9.7	7.5	600 A A	1984@50
225/50R18	1601654	99W	XL	10	26.9	9.2	7.0	600 A A	1709@50
225/40R18	1601661	92W	XL	10	24.9	9.1	8.0	600 A A	1389@50
215/45R18	1601664	93W	XL	10	25.5	8.4	7.0	600 A A	1433@50
245/40R18	1601665	97W	XL	10	25.7	9.8	8.5	600 A A	1609@50
245/55R18	1601666	107W	XL	10	28.6	10.0	7.5	600 A A	2149@50
255/35R18	1601667	90W	SL	10	25.0	10.2	9.0	600 A A	1323@44
235/40R18	1601671	95W	XL	10	25.4	9.5	8.5	600 A A	1521@50
235/45R18	1601672	98W	XL	10	26.3	9.3	8.0	600 A A	1653@50
225/45R18	1601682	95W	XL	10	25.9	8.9	7.5	600 A A	1521@50
235/55R19	1601630	105W	XL	10	29.2	9.7	7.5	600 A A	2039@50
245/40R19	1601631	98W	XL	10	26.7	9.8	8.5	600 A A	1653@50
255/40R19	1601633	100W	XL	10	27.1	10.2	9.0	600 A A	1764@50
225/55R19	1601635	103W	XL	10	28.8	9.2	7.0	600 A A	1929@50
245/45R19	1601637	102W	XL	10	27.7	9.6	8.0	600 A A	1874@50
245/50R19	1601639	101W	SL	10	28.7	10.0	7.5	600 A A	1819@44
275/40R19	1601640	101W	SL	10	27.7	10.9	7.5	600 A A	1819@44
255/35R19	1601642	96W	XL	10	26.0	10.2	9.0	600 A A	1565@50
255/45R19	1601643	104W	XL	10	28.1	10.0	8.5	600 A A	1984@50
235/50R19	1601646	103W	XL	10	28.3	9.7	7.5	600 A A	1929@50
235/40R19	1601655	92W	SL	10	26.4	9.5	8.5	600 A A	1389@44
225/45R19	1601656	92W	SL	10	27.0	8.9	7.5	600 A A	1389@44
235/35R19	1601670	91W	XL	10	25.5	9.5	8.5	600 A A	1356@50
225/40R19	1601677	93W	XL	10	25.9	9.1	8.0	600 A A	1433@50
245/35R19	1601683	93W	XL	10	25.8	9.8	8.5	600 A A	1433@50
245/40R20	1601632	99Y	XL	10	27.7	9.8	8.5	600 A A	1709@50
255/40R20	1601636	101Y	XL	10	28.0	10.2	9.0	600 A A	1819@50
245/45R20	1601638	103Y	XL	10	28.7	9.6	8.0	600 A A	1929@50
245/50R20	1601641	105W	XL	10	29.7	10.0	7.5	600 A A	2039@50
245/35R20	1601647	95W	XL	10	26.8	9.8	8.5	600 A A	1521@50
235/55R20	1601652	102W	SL	10	30.2	9.7	7.5	600 A A	1874@44
255/45R20	1601659	105Y	XL	10	29.1	10.0	8.5	600 A A	2039@50
275/35R20	1601660	102Y	XL	10	27.6	10.9	9.5	600 A A	1874@50
275/40R20	1601668	106Y	XL	10	28.7	10.9	9.5	600 A A	2094@50

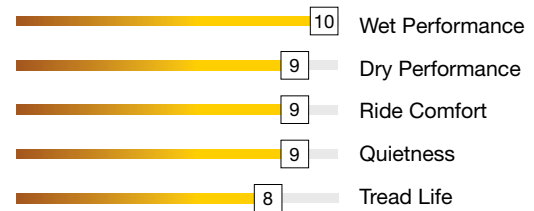

50,000 Mile Limited Treadwear Warranty

Crafted with state-of-the-art materials and an innovative design, the SUMMIT ULTRAMAX UHP AS tire delivers excellent durability, superior traction, stability, and reduced noise. Whether for daily commutes or long-distance drives, this tire offers reliable, high-performance comfort.

TIRE FEATURES

- **Premium Structural Integrity:** a reinforced belt ply structure ensures tread rigidity and stability at high speeds.
- **Advanced Sidewall Engineering:** the optimized sidewall design absorbs road impacts and vibrations, offering an unparalleled level of comfort for an ultra-high performance all-season tire.
- **Noise-Reduction Technology:** innovative asymmetric tread pattern, with carefully placed tread blocks, reduces road noise and provides excellent cornering stability.






ULTRAMAX 4S



Size	PART#	LI/SR	L.R.	T.D.	OD	SW	RW	UTQG	MAX LOAD
				32nds	in.	in.	in.		lbs@psi (1X)
185/65R15	1603862	88H		11	24.4	7.4	5.5	500 A A	1235@44
195/65R15	1603863	91H		11	25.0	7.9	6.0	500 A A	1356@44
205/55R16	1603864	91V		11	24.9	8.4	6.5	500 A A	1356@44
205/60R16	1603865	96V	XL	11	25.7	8.2	6.0	500 A A	1565@50
205/65R16	1603866	95H		11	26.5	8.2	6.0	500 A A	1521@44
215/55R16	1603867	93V		11	25.3	8.9	7.0	500 A A	1433@44
215/60R16	1603868	99H	XL	11	26.1	8.7	6.5	500 A A	1709@50
215/65R16	1603869	102H	XL	11	27.0	8.7	6.5	500 A A	1874@50
235/70R16	1603870	106H		11	29.0	9.4	7.0	500 A A	2094@44
205/50R17	1603871	93V	XL	11	25.1	8.4	6.5	500 A A	1433@50
215/45R17	1603872	91W	XL	11	24.6	8.4	7.0	500 A A	1356@50
215/50R17	1603873	95W	XL	11	25.5	8.9	7.0	500 A A	1521@50
215/55R17	1603874	98V	XL	11	26.3	8.9	7.0	500 A A	1653@50
215/60R17	1603875	100H	XL	11	27.2	8.7	6.5	500 A A	1764@50
215/65R17	1603876	103H	XL	11	28.0	8.7	6.5	500 A A	1929@50
225/45R17	1603877	94V	XL	11	25.0	8.9	7.5	500 A A	1477@50
225/50R17	1603878	98V	XL	11	25.9	9.2	7.0	500 A A	1653@50
225/55R17	1603879	101V	XL	11	26.8	9.2	7.0	500 A A	1819@50
225/60R17	1603886	103H	XL	11	27.6	9.0	6.5	500 A A	1929@50
225/65R17	1603882	102H		11	28.5	9.0	6.5	500 A A	1874@44
235/55R17	1603885	103V	XL	11	27.2	9.6	7.5	500 A A	1929@50
235/65R17	1603884	108H	XL	11	29.1	9.4	7.0	500 A A	2205@50
225/40R18	1603883	92V	XL	11	25.1	9.1	8.0	500 A A	1389@50
225/45R18	1603880	95V	XL	11	25.9	8.9	7.5	500 A A	1521@50
225/50R18	1603887	99V	XL	11	26.9	9.2	7.0	500 A A	1709@50
225/55R18	1603881	102V	XL	11	27.8	9.2	7.0	500 A A	1874@50
225/60R18	1603888	104H	XL	11	28.6	9.0	6.5	500 A A	1984@50
235/40R18	1603889	95V	XL	11	25.4	9.5	8.5	500 A A	1521@50
235/45R18	1603890	98W	XL	11	26.3	9.3	8.0	500 A A	1653@50
235/50R18	1603891	101V	XL	11	27.3	9.6	7.5	500 A A	1819@50
235/55R18	1603892	104V	XL	11	28.1	9.6	7.5	500 A A	1984@50
235/60R18	1605390	107V	XL	11	29.1	9.4	7.0	500 A A	2149@50
235/65R18	1603894	110H	XL	11	30.0	9.4	7.0	500 A A	2337@50
245/40R18	1603895	97W	XL	11	25.7	9.8	8.5	500 A A	1609@50
245/60R18	1603896	109H	XL	11	29.6	9.8	7.0	500 A A	2271@50
225/55R19	1603897	103V	XL	11	28.8	9.2	7.0	500 A A	1929@50
235/40R19	1603898	96V	XL	11	26.4	9.5	8.5	500 A A	1565@50
235/50R19	1603899	103W	XL	11	28.3	9.6	7.5	500 A A	1929@50
235/55R19	1603900	105V	XL	11	29.2	9.6	7.5	500 A A	2039@50
245/45R19	1603901	102V	XL	11	27.7	9.6	8.0	500 A A	1874@50
255/35R19	1603902	96V	XL	11	26.0	10.2	9.0	500 A A	1565@50
255/40R19	1603903	100V	XL	11	27.0	10.2	9.0	500 A A	1764@50
235/55R20	1603904	105V	XL	11	30.2	9.6	7.5	500 A A	2039@50
245/45R20	1603905	103V	XL	11	28.7	9.6	8.0	500 A A	1929@50
245/50R20	1603906	105V	XL	11	29.7	10.0	7.5	500 A A	2039@50
255/45R20	1603907	105V	XL	11	29.1	10.0	8.5	500 A A	2039@50
265/50R20	1603908	111V	XL	11	30.5	10.9	8.5	500 A A	2403@50
235/65R16C	1603909	121/119R	E	13	28.0	9.4	7.0	500 A A	3197@83

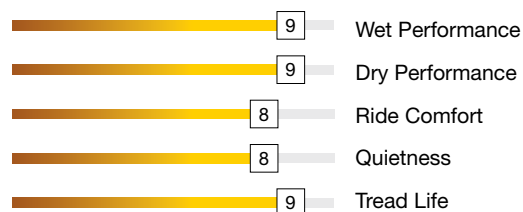

60,000 Mile Limited Treadwear Warranty

The Summit Ultramax 4S is your ultimate all-weather tire, engineered to handle every season with confidence. Whether you're navigating sun-soaked pavement, rain-slick roads, or tackling light snow, the Ultramax 4S delivers superior grip and stability across all conditions. Summit Ultramax 4S - Ready for Nature.

TIRE FEATURES


- Refined Handling Across All Conditions: carefully engineered asymmetric tread ensures balanced performance on both dry roads and in challenging weather. Experience precise steering, smooth cornering, and enhanced stability with every turn.
- Year-Round Comfort: seamlessly transition between seasons, these tires offer a quiet, smooth ride while adapting to rain, snow, and sunshine—ensuring comfort in all conditions without compromise.
- Durability: even tread wear and enhanced longevity are achieved through interlocked 3D siping and purpose-built rubber compounds.





TRAIL CLIMBER SUV²

Size	PART#	LI/SR	L.R.	T.D.	OD	SW	RW	UTQG	MAX LOAD
				32nds	in.	in.	in.		lbs@psi (1X)
215/65R16	20663	98H		10	27.0	8.7	6.5	700 A A	1653@44
215/70R16	20690	100H		10	27.9	8.7	6.5	700 A A	1764@44
235/60R16	20664	100H		10	27.1	9.4	7.0	700 A A	1764@44
245/70R16	20665	107T		10	29.5	9.8	7.0	700 A A	2149@44
255/70R16	20667	111H		10	30.1	10.2	7.5	700 A A	2403@44
265/70R16	20666	112H		10	30.6	10.7	8.0	700 A A	2469@44
215/60R17	20681	96H		10	27.2	8.7	6.5	700 A A	1565@44
225/55R17	20662	97V		10	26.8	9.2	7.0	700 A A	1609@44
225/60R17	20679	99H		10	27.6	9.0	6.5	700 A A	1709@44
225/65R17	10454	102H		10	28.5	9.0	6.5	700 A A	1874@44
235/55R17	20680	99V		10	27.2	9.6	7.5	700 A A	1709@44
235/60R17	20684	102H		10	28.1	9.4	7.0	700 A A	1874@44
235/65R17	20675	104H		10	29.1	9.4	7.0	700 A A	1984@44
245/65R17	20685	107H		10	29.5	9.8	7.0	700 A A	2149@44
255/60R17	20683	106H		10	29.1	10.2	7.5	700 A A	2094@44
265/65R17	20682	112H		10	30.6	10.7	8.0	700 A A	2469@44
215/55R18	20693	95H		10	27.3	8.9	7.0	700 A A	1521@44
225/55R18	20686	98V		10	27.8	9.2	7.0	700 A A	1653@44
225/60R18	20671	100H		10	28.6	9.0	6.5	700 A A	1764@44
235/50R18	20677	97V		10	27.3	9.6	7.5	700 A A	1609@44
235/55R18	20687	100V		10	28.1	9.6	7.5	700 A A	1764@44
235/60R18	20670	107V	XL	10	29.1	9.4	7.0	700 A A	2149@50
235/65R18	20688	106H		10	30.0	9.4	7.0	700 A A	2094@44
245/60R18	20696	105H		10	29.6	9.8	7.0	700 A A	2039@44
255/55R18	20672	109V	XL	10	29.0	10.4	8.0	700 A A	2271@50
255/65R18	20698	111T		10	31.1	10.2	7.5	700 A A	2403@44
265/60R18	20691	110H		10	30.5	10.7	8.0	700 A A	2337@44
225/55R19	20702	99V		10	28.8	9.2	7.0	700 A A	1709@44
235/45R19	20674	95V		10	27.4	9.3	8.0	700 A A	1521@44
235/50R19	20692	103V	XL	10	28.3	9.6	7.5	700 A A	1929@50
235/55R19	20689	105V	XL	10	29.2	9.6	7.5	700 A A	2039@50
245/55R19	20697	103V		10	29.6	10.0	7.5	700 A A	1929@44
255/50R19	20676	107V	XL	10	29.1	10.4	8.0	700 A A	2149@50
255/55R19	20673	111V	XL	10	30.0	10.4	8.0	700 A A	2403@50
255/60R19	20699	109H		10	31.1	10.2	7.5	700 A A	2271@44
265/50R19	20695	110V	XL	10	29.5	10.9	8.5	700 A A	2337@50
235/55R20	20705	105V	XL	10	30.2	9.6	7.5	700 A A	2039@50
245/50R20	20706	102V		10	29.7	10.0	7.5	700 A A	1874@44
245/60R20	20708	107H		10	31.6	9.8	7.0	700 A A	2149@44
255/50R20	20668	109V	XL	10	30.1	10.4	8.0	700 A A	2271@50
255/55R20	20700	110V	XL	10	31.0	10.4	8.0	700 A A	2337@50
265/50R20	20669	107H		10	30.5	10.9	8.5	700 A A	2149@44
275/40R20	20678	106W	XL	10	28.7	10.9	9.5	700 A A	2094@50
265/40R21	20701	105W	XL	10	29.3	10.7	9.5	700 A A	2039@50
275/40R21	20704	107W	XL	10	29.6	10.9	9.5	700 A A	2149@50
275/45R21	20703	110W	XL	10	30.7	10.7	9.0	700 A A	2337@50
285/40R21	20709	109W	XL	10	30.0	11.4	10.0	700 A A	2271@50
295/35R21	20694	107W	XL	10	29.1	11.9	10.5	700 A A	2149@50
315/40R21	20707	115W	XL	10	30.9	12.6	11.0	700 A A	2679@50

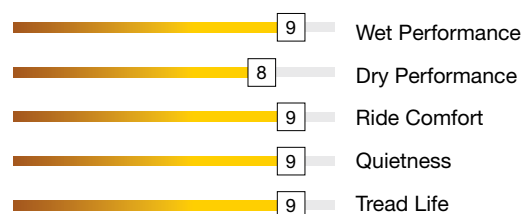

60,000 Mile Limited Treadwear Warranty

Loading up the SUV for an adventure or part of your daily routine the TRAIL CLIMBER SUV² can be trusted no matter where the road takes you. Modern tread design, with enhanced rubber compounds, reduces road noise while providing excellent handling and traction. Whether your drive has a purpose or just the thrill of the open road is calling, the TRAIL CLIMBER SUV² assures tranquil and secure travel on all routes.

TIRE FEATURES

- **RIDE COMFORT:** SPPS noise simulation technology optimizes tread lug arrangement minimizing road noise.
- **TRACTION:** Enhanced wet handling is aided by wide circumferential grooves working together with shoulder lateral grooves.
- **TREAD LIFE:** Wide footprint with optimized shoulder profile provides stable tread contact and promotes even wear.





TRAIL CLIMBER HT03


The Trail Climber HT03 is Summit's premium HT (Highway) All-Season tire. Designed to provide outstanding handling and braking performance, packaged with a smooth drive for pickup trucks, large SUV's and 4X4's. Guaranteed to endure and go the distance, backed by Summit's trustworthy reputation and warranty.

TIRE FEATURES

- Enhanced Traction: Multiple 3D siping on the tread contact patch with 4 circumferential channels ensure water displacement and reliable traction in all road conditions.
- Trusted Durability: Reinforced tire casing construction promotes durable even tread wear and reliable load carrying capacity.
- Proven Comfort: Void angles and lateral groove tie bars are designed to create smooth airflow and increase handling stability.

50,000 Mile Limited Treadwear Warranty - LT sizes

60,000 Mile Limited Treadwear Warranty - P-metric sizes

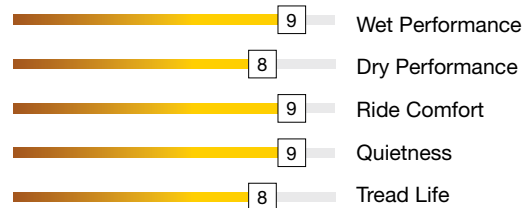


Size	PART#	LI/SR	L.R.	T.D.	OD	SW	RW	UTQG	MAX LOAD	MAX LOAD
				32nds	in.	in.	in.		lbs@psi (1X)	lbs@psi (2X)
235/75R15	20727	105T		11	28.9	9.3	6.0	700 A B	2039@44	
235/70R16	20726	106T		11	29.0	9.5	7.0	700 A B	2094@44	
245/70R16	20730	107T		11	29.5	9.8	7.0	700 A B	2149@44	
245/75R16	20732	111T		11	30.5	9.8	7.0	700 A B	2403@44	
255/70R16	20733	111T		11	30.1	10.2	7.5	700 A B	2403@44	
265/70R16	20739	112T		11	30.6	10.7	8.0	700 A B	2469@44	
265/75R16	20742	116T		11	31.7	10.5	7.5	700 A B	2756@44	
235/75R17	20728	109T		11	30.9	9.3	6.5	700 A B	2271@44	
245/65R17	20729	107T		11	29.5	9.8	7.0	700 A B	2149@44	
245/70R17	20731	110T		11	30.6	9.8	7.0	700 A B	2337@44	
265/65R17	20737	112S		11	30.6	10.7	8.0	700 A B	2469@44	
265/70R17	20740	115T		11	31.7	10.7	8.0	700 A B	2679@44	
255/70R18	20734	113T		11	32.1	10.2	7.5	700 A B	2535@44	
265/60R18	20736	110H		11	30.5	10.7	8.0	700 A A	2337@44	
265/65R18	20738	114T		11	31.5	10.7	8.0	700 A B	2601@44	
265/70R18	20741	116T		11	32.6	10.7	8.0	700 A B	2756@44	
275/65R18	20745	116T		11	32.1	11.0	8.0	700 A B	2756@44	
265/50R20	20735	107V		11	30.5	10.9	8.5	700 A A	2149@44	
275/55R20	20743	117T	XL	11	31.9	11.2	8.5	700 A A	2833@50	
275/60R20	20744	115T		11	33.0	11.0	8.0	700 A A	2679@44	
285/45R22	20746	114H	XL	11	32.1	11.2	9.5	700 A A	2601@50	
275/50R22	1605381K	111H	SL	11	32.9	11.2	8.5	700 A A	2403@44	
LT215/85R16	20747	115/112R	10PR	14	30.4	8.5	6.0		2680@80	2470@80
LT225/75R16	20748	115/112R	10PR	14	29.3	8.8	6.0		2680@80	2470@80
LT235/85R16	20750	120/116R	10PR	14	31.7	9.3	6.5		3042@80	2778@80
LT245/75R16	20752	120/116R	10PR	14	30.5	9.8	7.0		3042@80	2778@80
LT265/75R16	20756	123/120R	10PR	14	31.7	10.5	7.5		3415@80	3085@80
LT235/80R17	20749	120/117R	10PR	14	31.8	9.3	6.5		3085@80	2835@80
LT245/70R17	20751	119/116S	10PR	14	30.6	9.8	7.0		3000@80	2755@80
LT245/75R17	20753	121/118S	10PR	14	31.5	9.8	7.0		3195@80	2910@80
LT265/70R17	20754	123/120S	10PR	14	31.7	10.7	8.0		3415@80	3085@80
LT265/70R18	20755	124/121S	10PR	14	32.6	10.7	8.0		3525@80	3195@80
LT275/65R18	20757	123/120S	10PR	14	32.1	11.0	8.0		3415@80	3085@80
LT275/70R18	20759	125/122S	10PR	14	33.2	11.0	8.0		3640@80	3305@80
LT275/65R20	20758	126/123S	10PR	14	34.1	11.0	8.0		3750@80	3415@80



TRAIL CLIMBER AT02

Size	PART#	LI/SR	L.R.	T.D.	OD	SW	RW	UTQG	MAX LOAD	MAX LOAD
				32nds	in.	in.	in.		lbs@psi (1X)	lbs@psi (2X)
235/75R15	20898	109S	XL	13	28.9	9.3	6.0	620 A B	2271@50	
235/70R16	20899	106S		13	29.0	9.5	7.0	620 A B	2094@44	
245/75R16	20900	111S		13	30.5	9.8	7.0	620 A B	2403@44	
265/70R16	20901	112T		13	30.6	10.7	8.0	620 A B	2469@44	
265/75R16	20902	116S		13	31.7	10.5	7.5	620 A B	2756@44	
235/65R17	20903	104S		13	29.1	9.5	7.0	620 A B	1984@44	
245/65R17	20904	107S		13	29.5	9.8	7.0	620 A B	2149@44	
245/70R17	20905	110T		13	30.6	9.8	7.0	620 A B	2337@44	
255/65R17	20906	110T		13	30.1	10.2	7.5	620 A B	2337@44	
265/65R17	20907	112S		13	30.6	10.7	8.0	620 A B	2469@44	
265/70R17	20908	115S		13	31.7	10.7	8.0	620 A B	2679@44	
265/65R18	20909	114T		13	31.5	10.7	8.0	620 A B	2601@44	
265/70R18	20910	116T		13	32.6	10.7	8.0	620 A B	2756@44	
275/65R18	20911	116T		13	32.1	11.0	8.0	620 A B	2756@44	
275/55R20	20897	117T	XL	13	31.9	11.2	8.5	620 A B	2833@50	
265/50R20	20912	111T	XL	13	30.5	10.9	8.5	620 A B	2403@50	
275/60R20	20913	115T		13	33.0	11.0	8.0	620 A B	2679@44	
285/45R22	20914	114H	XL	13	32.1	11.2	9.5	620 A B	2601@50	
LT225/75R16	20921	115/112S	10PR	16	29.3	8.8	6.0		2680@80	2470@80
LT235/85R16	20922	120/116S	10PR	16	31.7	9.3	6.5		3042@80	2778@80
LT245/75R16	20923	120/116S	10PR	16	30.5	9.8	7.0		3042@80	2778@80
LT265/75R16	20924	123/120S	10PR	16	31.7	10.5	7.5		3415@80	3085@80
LT285/75R16	1605183K	126/123S	10PR	16	32.8	11.3	8		3750@80	3425@80
LT235/80R17	20925	120/117R	10PR	16	31.8	9.3	6.5		3085@80	2835@80
LT245/70R17	20926	119/116S	10PR	16	30.6	9.8	7.0		3000@80	2755@80
LT245/75R17	20927	121/118S	10PR	16	31.5	9.8	7.0		3195@80	2910@80
LT265/70R17	20928	123/120S	10PR	16	31.7	10.7	8.0		3415@80	3085@80
LT285/70R17	20929	126/123S	10PR	16	32.8	11.5	8.5		3750@80	3415@80
LT315/70R17	20930K	126/123S	10PR	16	34.4	12.7	9.5		3750@65	3415@65
LT265/70R18	20931	124/121S	10PR	16	32.6	10.7	8.0		3525@80	3195@80
LT275/65R18	20932	123/120R	10PR	16	32.1	11.0	8.0		3415@80	3085@80
LT275/70R18	20933	125/122R	10PR	16	33.2	11.0	8.0		3640@80	3305@80
LT265/60R20	20934	121/118R	10PR	16	32.5	10.7	8.0		3195@80	2910@80
LT275/55R20	20935	120/117R	10PR	16	31.9	11.2	8.5		3085@80	2835@80
LT275/60R20	20936	123/120R	10PR	16	33.0	11.0	8.0		3415@80	3085@80
LT275/65R20	20937	126/123R	10PR	16	34.1	11.0	8.0		3750@80	3415@80
LT285/60R20	20938	125/122R	10PR	16	33.5	11.5	8.5		3640@80	3305@80
LT305/55R20	20939	121/118R	10PR	16	33.2	12.4	9.5		3195@65	2910@65
31X10.50R15	20915	109S	6PR	16	30.5	10.6	8.5		2270@50	
35X12.50R17	20916	125R	10PR	16	34.5	12.5	10.0		3640@65	
33X12.50R18	20917	118S	10PR	16	32.5	12.5	10.0		2910@65	
35X12.50R18	20918	123R	10PR	16	34.5	12.5	10.0		3415@65	
33X12.50R20	20919	114S	10PR	16	32.5	12.5	10.0		2600@65	
35X12.50R20	20920	121R	10PR	16	34.5	12.5	10.0		3195@65	

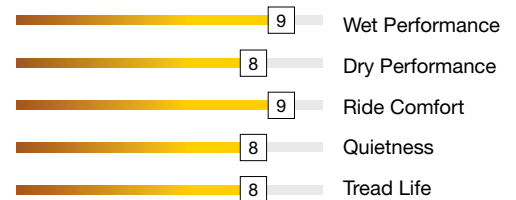

The Summit Trail Climber AT02 is your trusted all terrain tire for trucks and SUVs. The AT02 is just as at home on the trails as it is navigating the daily roads and highways. Reliable in all seasons, with deep tread and proudly wearing the 3PMS certification badge. Enjoy the Trail Climber AT02, as it ensures a smooth and quiet ride every time.

TIRE FEATURES

- Wide tread footprint, supported by reinforced shoulders, ensure even pressure distribution sustaining even wear for extended tread life.
- Functional scalloped shoulders with deep tread depths and enhanced sidewall biters guarantees ample traction when required
- Four circumferential grooves with lateral shoulder channels expedite water evacuation.

50,000 Mile Limited Treadwear Warranty






TRAIL CLIMBER RT

The SUMMIT TRAIL CLIMBER RT provides reliable versatility while ensuring steadfast traction and stability across multiple terrains. From rugged trails to urban streets, the deep tread lugs and aggressive sidewall biters guarantee confidence and performance wherever the road leads.

TIRE FEATURES

- Deep stepped lug treads with scalloped shoulders and aggressive sidewall biters guarantee traction & protection from the elements when needed most.
- Engineered with proprietary rubber compound for on/off road use delivers unparalleled durability.
- 3PMS certified provides confident traction when the temperature drops.

50,000 Mile Limited Treadwear Warranty

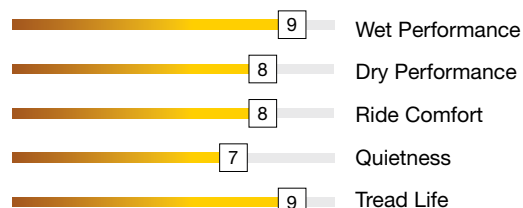

Size	PART#	LI/SR	L.R.	T.D.	OD	SW	RW	UTQG	MAX LOAD	MAX LOAD
				32nds	in.	in.	in.		lbs@psi (1X)	lbs@psi (2X)
265/70R17	1600698	115T		16	31.7	10.7	8.0	600 A B	2679@44	
255/70R18	1600694	116T	XL	16	32.1	10.2	7.5	600 A B	2756@50	
265/60R18	1600696	114S	XL	16	30.5	10.7	8.0	600 A B	2601@50	
265/65R18	1600697	116T	XL	16	31.5	10.7	8.0	600 A B	2756@50	
265/70R18	1600699	116S		16	32.6	10.7	8.0	600 A B	2756@44	
275/65R18	1600702	116T	XL	16	32.1	11.0	8.0	600 A B	2756@50	
265/50R20	1600695	111T	XL	16	30.5	10.9	8.5	600 A B	2403@50	
275/55R20	1600700	117T	XL	16	31.9	11.2	8.5	600 A B	2833@50	
275/60R20	1600701	116T	XL	16	33.0	11.0	8.0	600 A B	2756@50	
285/45R22	1600703	114Q	XL	16	32.1	11.2	9.5	600 A B	2601@50	
LT245/70R17	1600704	119/116Q	10PR	18	30.6	9.8	7.0		3000@80	2755@80
LT245/75R17	1600705	121/118Q	10PR	18	31.5	9.8	7.0		3195@80	2910@80
LT265/70R17	1600707	123/120Q	10PR	18	31.7	10.7	8.0		3415@80	3085@80
LT285/70R17	1600714	126/123Q	10PR	18	32.8	11.5	8.5		3750@80	3415@80
LT265/65R18	1600706	122/119Q	10PR	18	31.5	10.7	8.0		3305@80	3000@80
LT265/70R18	1600708	124/121Q	10PR	18	32.6	10.7	8.0		3525@80	3195@80
LT275/65R18	1600711	123/120Q	10PR	18	32.1	11.0	8.0		3415@80	3085@80
LT275/70R18	1600713	125/122Q	10PR	18	33.2	11.0	8.0		3640@80	3305@80
LT275/55R20	1600709	120/117Q	10PR	18	31.9	11.2	8.5		3085@80	2835@80
LT275/60R20	1600710	123/120Q	10PR	18	33.0	11.0	8.0		3415@80	3085@80
LT275/65R20	1600712	126/123Q	10PR	18	34.1	11.0	8.0		3750@80	3415@80
LT305/55R20	1600715	125/122Q	12PR	18	33.2	12.4	9.5		3640@80	3305@80
33X12.50R17LT	1600716	120Q	10PR	18	32.5	12.5	10.0		3085@65	
35X12.50R17LT	1600720	125Q	10PR	18	34.5	12.5	10.0		3640@65	
37X12.50R17LT	1600725	124Q	8PR	18	36.5	12.5	10.0		3525@50	
33X12.50R18LT	1600717	122Q	12PR	18	32.5	12.5	10.0		3305@80	
35X12.50R18LT	1600721	128Q	12PR	18	34.5	12.5	10.0		3970@80	
37X12.50R18LT	1600726	128Q	10PR	18	36.5	12.5	10.0		3970@65	
33X12.50R20LT	1600718	119Q	12PR	18	32.5	12.5	10.0		3000@80	
35X12.50R20LT	1600722	125Q	12PR	18	34.5	12.5	10.0		3640@80	
35X13.50R20LT	1600724	126Q	12PR	18	34.5	13.6	11.0		3750@80	
37X12.50R20LT	1600727	126Q	10PR	18	36.5	12.5	10.0		3750@65	
33X12.50R22LT	1600719	114Q	12PR	18	32.5	12.5	10.0		2600@80	
35X12.50R22LT	1600723	121Q	12PR	18	34.5	12.5	10.0		3195@80	
37X12.50R22LT	1600728	127Q	12PR	18	36.5	12.5	10.0		3860@80	
37X13.50R22LT	1600729	128Q	12PR	18	36.5	13.6	11.0		3970@80	



ULTRAMAX WINTER PRO

Conquer winter driving with the Ultramax Winter Pro, engineered to deliver consistent performance in extreme cold conditions. Built for confident handling on snow- and icy-covered roads, this winter tire combines a precision directional tread, advanced siping, and a cold-weather optimized compound to enhance traction, control, and braking. When winter demands more, the Ultramax Winter Pro delivers confidence with every journey.

TIRE FEATURES

- **DIRECTIONAL WINTER TREAD PATTERN:** Directional V-shaped tread design channels snow, slush, and water away from the contact patch to enhance traction and stability on challenging winter surfaces
- **ADVANCED 3D SIPING TECHNOLOGY:** Creates multiple biting edges improving grip, handling, and braking on snow- and ice-covered roads.
- **COLD-WEATHER PERFORMANCE COMPOUND:** Maintains flexibility in low temperatures for consistent control and shorter braking distances in winter conditions.



Size	PART#	LI/SR	L.R.	T.D.	OD	SW	RW	MAX LOAD 1X	WT.
				32nds	in.	in.	in.	lbs@psi	
175/65R14	1607053K	82T		13	23.0	7.0	5.0	1047@44	17
175/70R14	1607052K	84T		13	23.7	7.0	5.0	1102@44	18
185/65R14	1607054K	86T		13	23.5	7.4	5.5	1168@44	19
175/65R15	1607074K	84T		13	24.0	7.0	5.0	1102@44	18
185/55R15	1607069K	82T		13	23.0	7.6	6.0	1047@44	19
185/60R15	1607059K	84T		13	23.7	7.4	5.5	1102@44	19
185/65R15	1607056K	92T	XL	13	24.5	7.4	5.5	1235@50	20
195/60R15	1607068K	88T		13	24.2	7.9	6.0	1235@44	20
195/65R15	1607057K	95T	XL	13	25.0	7.9	6.0	1356@50	21
205/65R15	1607058K	94T		13	25.5	8.2	6.0	1477@44	22
235/75R15	1607055K	105S		13	28.9	9.3	6.5	2039@44	31
205/55R16	1607063K	94H	XL	13	24.9	8.4	6.5	1356@50	23
205/60R16	1607071K	96T	XL	13	25.7	8.2	6.0	1389@50	22
205/65R16	1607060K	95T		13	26.5	8.2	6.0	1521@44	25
215/55R16	1607064K	97H	XL	13	25.3	8.9	7.0	1609@50	24
215/60R16	1607061K	95T		13	26.1	8.7	6.5	1521@44	25
215/65R16	1607076K	98T		13	27.0	8.7	6.5	1653@44	26
215/70R16	1607104K	100S		13	27.9	8.7	6.5	1764@44	27
225/60R16	1607062K	98T		13	26.6	9.0	6.5	1653@44	26
225/65R16	1607118K	100T		13	27.5	9.0	6.5	1764@44	27
235/70R16	1607085K	106S		13	29.0	9.5	7.0	2094@44	30
205/50R17	1607077K	93H	XL	13	25.1	8.4	6.5	1433@50	24
205/55R17	1607112K	95H	XL	13	25.9	8.4	6.5	1521@50	23
215/45R17	1607066K	91H	XL	13	24.7	8.4	7.0	1356@50	22
215/50R17	1607080K	95H	XL	13	25.5	8.9	7.0	1521@50	24
215/55R17	1607072K	98H	XL	13	26.3	8.9	7.0	1477@50	25
215/60R17	1607097K	96T		13	27.2	8.7	6.5	1565@44	26
215/65R17	1607092K	99T		13	28.0	8.7	6.5	1709@44	28
225/45R17	1607067K	94H	XL	13	25.0	8.9	7.5	1477@50	24
225/50R17	1607083K	98H	XL	13	25.9	9.2	7.0	1653@50	27
225/55R17	1607065K	101H	XL	13	26.8	9.2	7.0	1609@50	28
225/60R17	1607095K	99T		13	27.6	9.0	6.5	1709@44	27
225/65R17	1607073K	106T	XL	13	28.5	9.0	6.5	1874@50	29

Size	PART#	LI/SR	L.R.	T.D.	OD	SW	RW	MAX LOAD 1X	WT.
				32nds	in.	in.	in.	lbs@psi	
235/45R17	1607070K	97T	XL	13	25.4	9.3	8.0	1609@50	25
235/55R17	1607094K	99H		13	27.2	9.7	7.5	1709@44	28
235/60R17	1607098K	102T		13	28.1	9.5	7.0	1874@44	29
235/65R17	1607091K	104S		13	29.1	9.5	7.0	1984@44	31
245/65R17	1607099K	107T		13	29.5	9.8	7.0	2149@44	32
265/70R17	1607082K	115S		13	31.7	10.7	8.0	2679@44	38
215/45R18	1607109K	93H	XL	13	25.6	8.4	7.0	1433@50	25
215/55R18	1607106K	95T		13	27.3	8.9	7.0	1521@44	26
225/40R18	1607075K	92H	XL	13	25.1	9.1	8.0	1389@50	23
225/45R18	1607078K	95T	XL	13	25.9	8.9	7.5	1521@50	25
225/50R18	1607119K	95H		13	26.9	9.2	7.0	1521@44	28
225/55R18	1607100K	98T		13	27.8	9.2	7.0	1653@44	28
225/60R18	1607088K	100T		13	28.6	9.0	6.5	1764@44	29
235/45R18	1607079K	98H	XL	13	26.3	9.3	8.0	1477@50	27
235/50R18	1607093K	101T	XL	13	27.3	9.7	7.5	1819@50	30
235/55R18	1607101K	104H	XL	13	28.2	9.7	7.5	1764@50	30
235/60R18	1607086K	103H		13	29.1	9.5	7.0	1929@44	31
235/65R18	1607102K	106T		13	30.0	9.5	7.0	2094@44	33
245/45R18	1607090K	100H	XL	13	26.7	9.6	8.0	1764@50	27
245/60R18	1607107K	105T		13	29.6	9.8	7.0	2039@44	34
255/55R18	1607087K	105H		13	29.0	10.4	8.0	2039@44	35
225/55R19	1607113K	99H		13	28.8	9.2	7.0	1709@44	30
235/35R19	1607081K	91H	XL	13	25.5	9.5	8.5	1356@50	25
235/40R19	1607116K	96H	XL	13	26.4	9.5	8.5	1565@50	27
235/55R19	1607103K	105H	XL	13	29.2	9.7	7.5	1819@50	31
245/55R19	1607108K	107H	XL	13	29.7	10.0	7.5	1929@50	34
235/55R20	1607117K	105H	XL	13	30.2	9.7	7.5	1874@50	33
255/45R20	1607089K	105V	XL	13	29.1	10.0	8.5	1819@50	33
255/50R20	1607084K	105V		13	30.1	10.4	8.0	2039@44	36
255/55R20	1607110K	107H		13	31.0	10.4	8.0	2149@44	37
275/55R20	1607096K	117T	XL	13	31.9	11.2	8.5	2833@50	40
275/60R20	1607105K	116S	XL	13	33.0	11.0	8.0	2756@50	43
255/40R21	1607115K	102V	XL	13	29.0	10.2	9.0	1874@50	33
265/45R21	1607111K	108H	XL	13	30.4	10.5	9.0	2205@50	36
275/45R21	1607114K	110H	XL	13	30.8	10.8	9.0	2337@50	38



TRAIL CLIMBER LMD

The last mile delivery industry with confidence using the SUMMIT trail climber LMD. Constantly in motion, this demanding sector requires tires that can handle every twist, stop, and acceleration. SUMMIT rises to the challenge, crafting the dependable and long-lasting TRAIL CLIMBER LMD with these demands in mind

TIRE FEATURES

- Durable casing is specifically designed to meet the demanding standards of commercial applications.
- Deep tread depth and cutting-edge rubber compounds, it delivers exceptional wear resistance, extending the lifespan of your tires.
- Enhanced by four wide circumferential grooves, it excels in wet conditions, providing superior traction for safer driving.



Tire size	PART#	LI/SR	L.R.	T.D. 32nds	O.D. in.	S.W. in.	R.W. in.	LCC (1x) lbs@psi	LCC (2x) lbs@psi
195/75R16C	20723	107/105R	8PR	13	27.4	7.7	5.0	2150@69	2040@69
225/75R16C	20724	121/120R	10PR	13	29.2	8.7	6.0	3197@83	3086@83
235/65R16C	20725	121/119R	10PR	13	28.0	9.4	7.0	3197@83	2998@83

Treadwear warranty does not apply to LT/LMD tires.





HI ROAD **ST**

The Hi Road ST is an ST tire designed for towed trailer applications. With its radial construction, the Hi Road ST is engineered to deliver long life and superior towing stability.

TIRE FEATURES

- Radial construction provides strength and durability
- Tread is designed to reduce excessive heat build up
- Tread pattern delivers a stable and quiet ride
- Rubber compound engineered to provide low rolling resistance
- Nylon overlay on 15" and 16" sizes.



Tire size	PART#	LI/SR	PLY	T.D.	O.D.	S.W.	R.W.	LCC (1x)	LCC (2x)
				32nds	in.	in.	in.	lbs@psi	lbs@psi
ST175/80R13	ST1-922	91/87L	6	10	24.0	7.0	5.0	1355@50	1200@50
ST205/75R14	ST1-930	100/96L	6	10	26.1	8.0	5.5	1760@50	1565@50
ST215/75R14	ST1-932	102/98L	6	10	26.7	8.5	6.0	1870@50	1650@50
ST205/75R15	ST1-943	107/102L	8	10	27.1	8.0	5.5	2150@65	1870@65
ST225/75R15	ST1-947	117/112L	10	10	28.3	8.8	6.0	2830@80	2470@80
ST235/80R16	ST1-961	124/120L	10	10	30.7	9.2	6.5	3520@80	3080@80
ST235/85R16	ST1-971	128/124L	12	10	31.7	9.2	6.5	3970@80	3525@80



USA LIMITED WARRANTY

PASSENGER & LIGHT TRUCK TIRES

This Limited Warranty / Adjustment Policy provides for tire replacement under specified conditions. This policy applies to SUMMIT tires used in normal highway service (commercial applications excluded) displaying warrantable conditions. Tires that become unserviceable or wear out because of neglect or mistreatment are excluded from SUMMIT warranty coverage.

THIS IS THE ONLY EXPRESSED WARRANTY MADE BY SAILUN TIRE AMERICAS. NO EMPLOYEE, RETAILER, DEALER, OR REPRESENTATIVE HAS THE AUTHORITY TO MAKE ANY WARRANTY, REPRESENTATION, PROMISE, OR AGREEMENT THAT IN ANY WAY ALTERS THE TERMS OR CONDITIONS OUTLINED IN THIS LIMITED WARRANTY.

WARRANTY ELIGIBILITY

This warranty applies to every SUMMIT replacement passenger car or light truck tire bearing the SUMMIT brand name and complete Department of Transportation serial identification number while operated in normal highway use (commercial applications excluded) in the USA. These tires are covered by this warranty for the life of the original usable tread depth (the original tread depth down to the level of tread wear indicators molded at 2/32 inch) within 60 months from the date of purchase (proof of purchases required). This warranty applies only to the original tire purchaser, and is not transferrable to any other party. This time period does not represent the expected service life for tires covered by this warranty.

WHAT IS NOT WARRANTED

Tires that have become unserviceable for the following reasons:

- Improper repairs or repairs that have failed. Improper repairs will void this Limited Warranty.
- Improper maintenance which can include: improper inflation or other maintenance abuses.
- Improper application or operations such as speeding, improper tire size and / or specification.
- Improper mounting / dismounting procedures, tire/wheel assembly imbalance.
- Mechanical irregularities in the vehicle or wheel, such as bent wheel assemblies, misalignment, worn or faulty components.
- Weather checking/cracking or failures after four years (60 months) from the date of manufacture.
- Accident, corrosion, vandalism, fire or damages caused by contamination by petroleum or other chemical products.
- Tires used in commercial applications such as taxis, shuttle vehicles and couriers.
- Irregular tread wear, or worn-out (beyond 2/32nds remaining tread depth) is not covered under the SUMMIT Limited Warranty.
- Road hazard injuries or damages caused by obstacles or debris, such as cuts, punctures (whether repairable or not), snags, bruises, tears, abrasions or impact breaks (whether repairable or not), damage from racing, off road use (forestry roads, gravel, rock) and misapplication of the tire to vehicle.etc.

ADDITIONAL EXCLUSIONS

- Materials added such as fillers, sealants, balancing substances and external tire treatments. If the added material is the cause of a failure the warranty will be deemed as void.
- Tires submitted for ride disturbance complaints after 25% (2/32") tread wear.
- Tires on vehicles registered or operated outside of the USA.
- Tires not purchased in the USA through the Sailun Tire Americas distribution channel.
- Tires purchased as used.
- Tires branded by SUMMIT to note special classification at time of purchase, such as "NA" (non-adjustable), or tires altered by notching or buffing.
- Tires used on vehicles in racing or special applications.
- Tires rendered unserviceable due to snow chains or studs.
- Flat spotting due to improper storage or caused by brake lock.
- SUMMIT products produced prior to January 1, 2013.

* Note: Consequential damage mentioned above may not apply to you based on individual State limitations.

WHAT IS WARRANTED

Tires that have become unserviceable for reasons other than stated above, within 48 months of the date of manufacturer or 60 months from the date of purchase (proof of purchase required) during its useable tread life, the tires will be replaced in accordance with this warranty.

MODEL DEFECTS LIMITED MILEAGE WARRANTY

Model	Defects/ Materials	# Mths	Tread Life Protection	Miles/ Months
SUMMIT ULTRAMAX A/S 2.0	Yes	60	Yes	60K/60
SUMMIT ULTRAMAX UHP AS	Yes	60	Yes	50K/60
SUMMIT ULTRAMAX 4S	Yes	60	Yes	60K/60
SUMMIT TRAIL CLIMBER SUV ²	Yes	60	Yes	60K/60
TRAIL CLIMBER HT03-LT sizes	Yes	60	Yes	50K/60
TRAIL CLIMBER HT03-P-metric sizes	Yes	60	Yes	60K/60
TRAIL CLIMBER AT02	Yes	60	Yes	50K/60
TRAIL CLIMBER RT	Yes	60	Yes	50K/60
ULTRAMAX WINTER PRO	Yes	60	No	-
TRAIL CLIMBER LMD	Yes	60	No	-
HI ROAD ST	Yes	60	No	-

Note: All tire models, staggered fitment vehicles have half mileage for rear tires if different size than the front tires.-

Select SUMMIT tires are assigned a Limited Mileage Warranty that protects the consumer against premature tread wear. If a tire reaches the end of its "usable tread life" before the stated mileage protection, the consumer will be issued a replacement SUMMIT tire on a prorated basis, which means the consumer will be responsible for a percentage of the replacement cost. In order to maintain limited mileage protection, all tires must be properly inflated, balanced, rotated and aligned as

recommended by vehicle manufacturer. All claims must be accompanied by the original purchase invoice as well as invoices for all on time services provided. Under all circumstances, the cost of mounting, balancing and any other service charges including applicable taxes, disposal fees are required to be paid by the consumer.

APPROVED TIRE ROTATION INTERVALS AND PATTERNS

The purpose of regularly rotating tires is to prolong their useful life by achieving more uniform wear for all tires on a vehicle. Before rotating tires, always consult the owner's manual for rotation recommendations for specific vehicles. If no rotation period is specified, tires should be rotated, at minimum, every 6,000 miles or at any sign of uneven wear. The first rotation is the most important. Rotating the tires as recommended by the vehicle or tire manufacturer will help even out the amount of wear on each tire and extend the life of the entire set. Such tires include: "Temporary Use Spares", unidirectional tires and tires with asymmetric tread designs. Also, some vehicles may have different sized tires mounted on the front and rear axles, and these different sized tires have rotation restrictions. Check the owner's manual for the proper rotation recommendations for these special cases. When tires are rotated, the inflation pressures must be adjusted for the tires' new positions in accordance with the actual loads on that wheel position and the vehicle manufacturer's recommendations. Underinflated or overinflated tires may result in poor handling, uneven tread wear, and increased fuel consumption. If the tires show uneven wear, ask the service person to check for and correct any misalignment, imbalance, or other mechanical problem before rotation.

ADJUSTMENT POLICY

Passenger and Light Truck Tires:
When the original usable tread is worn 25% (2/32") or less, and a warrantable condition is found, the tire will be replaced with a comparable new SUMMIT tire free of charge. Replacement tires will be mounted and balanced at the vehicle owner's expense. Other service charges such as tire rotation, alignment or applicable taxes are payable by the customer. When a tire has worn past the above specified period for free replacement and a warrantable condition is found, the customer must pay for the cost of a new comparable SUMMIT passenger or light truck tire on a prorated basis. The dealer shall determine this cost by multiplying the percentage of usable tread worn by the current retail selling price (Suggested Retail Price x 80%) of that tire at the time of warranty replacement. The cost of mounting, balancing and any other service charges or applicable taxes are payable by the customer.

MANDATORY TIRE REGISTRATION

For tires purchased in the USA, please register your tires at: www.summittireusa.com

ALL SUMMIT TIRE WARRANTIES MUST BE SUBMITTED THROUGH THE POINT OF PURCHASE

Rev 6.26U





ROAD HAZARD REPLACEMENT PROGRAM

SUMMIT Tire offers a “limited, free replacement” road hazard program which applies to all SUMMIT passenger and light truck patterns. (ST tires are not part of this replacement program). This program is a gesture of goodwill and not a warranty that your tire will not fail due to a road hazard. This free replacement road hazard program applies only during the first 3/32 of the original usable tread or two years from the date of purchase, whichever comes first. SUMMIT will replace the un-repairable tire with a similar new SUMMIT Tire. Mounting, balancing and applicable taxes are the responsibility of the consumer. Once a tire is worn beyond the first 3/32, or more than two years from date of purchase, this road hazard program is null and void. Repairable tires must always be repaired at the vehicle owner’s expense.

The Road Hazard Replacement Program applies to all tires purchased after January 1, 2025.
(Tires purchased prior to 1/1/2025 do not qualify for this program)





PASSENGER & LIGHT TRUCK TIRE CATALOG

summittireusa.com

V7.26U