



Summit tires

PASSENGER & LIGHT TRUCK TIRES

summittireusa.com



TABLE OF CONTENTS

| | |
|----|--------------------------------------|
| 4 | ULTRAMAX A/S 2.0 |
| 5 | ULTRAMAX UHP AS |
| 6 | TRAIL CLIMBER SUV² |
| 7 | TRAIL CLIMBER HT03 |
| 8 | TRAIL CLIMBER AT02 |
| 9 | TRAIL CLIMBER RT |
| 10 | TRAIL CLIMBER LMD |
| 11 | HI ROAD ST |








ULTRAMAX A/S 2.0

| Size | PART# | LI/SR | L.R. | TD | OD | SW | RW | UTQG | MAX LOAD |
|-----------|-------|-------|------|--------|------|-----|-----|---------|--------------|
| | | | | 32/in. | in. | in. | in. | | lbs@psi (1X) |
| 175/65R14 | 20645 | 86T | XL | 10 | 23 | 7 | 5 | 420 A A | 1168@50 |
| 175/70R14 | 20640 | 84T | | 10 | 23.7 | 7 | 5 | 420 A A | 1102@44 |
| 185/65R14 | 20629 | 86H | | 10 | 23.5 | 7.4 | 5.5 | 420 A A | 1168@44 |
| 195/70R14 | 20637 | 91T | | 10 | 24.8 | 7.9 | 6 | 420 A A | 1356@44 |
| 175/55R15 | 20660 | 77H | | 10 | 22.6 | 7.2 | 5.5 | 420 A A | 908@44 |
| 175/65R15 | 20653 | 84H | | 10 | 24 | 7 | 5 | 420 A A | 1102@44 |
| 185/55R15 | 20639 | 82V | | 10 | 23 | 7.6 | 6 | 420 A A | 1047@44 |
| 185/60R15 | 20627 | 88H | XL | 10 | 23.7 | 7.4 | 5.5 | 420 A A | 1235@50 |
| 185/65R15 | 20621 | 92H | XL | 10 | 24.4 | 7.4 | 5.5 | 420 A A | 1389@50 |
| 195/60R15 | 20623 | 88H | | 10 | 24.2 | 7.9 | 6 | 420 A A | 1235@44 |
| 195/65R15 | 20614 | 91H | | 10 | 25 | 7.9 | 6 | 420 A A | 1356@44 |
| 205/60R15 | 20646 | 95H | XL | 10 | 24.7 | 8.2 | 6 | 420 A A | 1521@50 |
| 205/65R15 | 20624 | 94H | | 10 | 25.5 | 8.2 | 6 | 420 A A | 1477@44 |
| 205/70R15 | 20635 | 96T | | 10 | 26.3 | 8.2 | 6 | 420 A A | 1565@44 |
| 215/70R15 | 20628 | 98T | | 10 | 26.9 | 8.7 | 6.5 | 420 A A | 1653@44 |
| 195/50R16 | 20654 | 84V | | 10 | 23.7 | 7.9 | 6 | 420 A A | 1102@44 |
| 195/55R16 | 20652 | 87H | | 10 | 24.4 | 7.9 | 6 | 420 A A | 1201@44 |
| 205/50R16 | 20648 | 87H | | 10 | 24.1 | 8.4 | 6.5 | 420 A A | 1201@44 |
| 205/55R16 | 20611 | 91H | | 10 | 24.9 | 8.4 | 6.5 | 420 A A | 1356@44 |
| 205/60R16 | 20620 | 92H | | 10 | 25.7 | 8.2 | 6 | 420 A A | 1389@44 |
| 205/65R16 | 20619 | 95H | | 10 | 26.5 | 8.2 | 6 | 420 A A | 1521@44 |
| 215/55R16 | 20622 | 97H | XL | 10 | 25.3 | 8.9 | 7 | 420 A A | 1609@50 |
| 215/60R16 | 20613 | 95H | | 10 | 26.1 | 8.7 | 6.5 | 420 A A | 1521@44 |
| 215/65R16 | 20626 | 98T | | 10 | 27 | 8.7 | 6.5 | 420 A A | 1653@44 |
| 225/60R16 | 20617 | 98H | | 10 | 26.6 | 9 | 6.5 | 420 A A | 1653@44 |
| 225/65R16 | 20636 | 100H | | 10 | 27.5 | 9 | 6.5 | 420 A A | 1764@44 |
| 235/60R16 | 20659 | 100V | | 10 | 27.1 | 9.4 | 7 | 420 A A | 1764@44 |
| 235/65R16 | 20647 | 103T | | 10 | 28 | 9.4 | 7 | 420 A A | 1929@44 |
| 205/50R17 | 20641 | 89V | | 10 | 25.1 | 8.4 | 6.5 | 420 A A | 1728@44 |
| 215/45R17 | 20649 | 87W | | 10 | 24.6 | 8.4 | 7 | 420 A A | 1201@44 |
| 215/50R17 | 20642 | 91V | | 10 | 25.5 | 8.9 | 7 | 420 A A | 1356@44 |
| 215/55R17 | 20612 | 94V | | 10 | 26.3 | 8.9 | 7 | 420 A A | 1477@44 |
| 215/60R17 | 20632 | 96T | | 10 | 27.2 | 8.7 | 6.5 | 420 A A | 1565@44 |
| 215/65R17 | 20634 | 99T | | 10 | 28 | 8.7 | 6.5 | 420 A A | 1709@44 |
| 225/45R17 | 20631 | 91V | | 10 | 25 | 8.9 | 7.5 | 420 A A | 1356@44 |
| 225/50R17 | 20616 | 94V | | 10 | 25.9 | 9.2 | 7 | 420 A A | 1477@44 |
| 225/55R17 | 20618 | 97V | | 10 | 26.8 | 9.2 | 7 | 420 A A | 1609@44 |
| 225/60R17 | 20625 | 99H | | 10 | 27.6 | 9 | 6.5 | 420 A A | 1709@44 |
| 225/65R17 | 10176 | 102T | | 10 | 28.5 | 9 | 6.5 | 420 A A | 1874@44 |
| 235/45R17 | 20651 | 97W | XL | 10 | 25.4 | 9.3 | 8 | 420 A A | 1609@50 |
| 235/55R17 | 20644 | 99V | | 10 | 27.2 | 9.6 | 7.5 | 420 A A | 1709@44 |
| 225/40R18 | 20658 | 92W | XL | 10 | 25.1 | 9.1 | 8 | 420 A A | 1389@50 |
| 225/50R18 | 20643 | 95H | | 10 | 26.9 | 9.2 | 7 | 420 A A | 1521@44 |
| 235/45R18 | 20650 | 94V | | 10 | 26.3 | 9.3 | 8 | 420 A A | 1477@44 |
| 235/50R18 | 20638 | 97V | | 10 | 27.3 | 9.6 | 7.5 | 420 A A | 1609@44 |
| 235/55R18 | 20630 | 100V | | 10 | 28.1 | 9.6 | 7.5 | 420 A A | 1764@44 |
| 235/60R18 | 20633 | 103H | | 10 | 29.1 | 9.4 | 7 | 420 A A | 1929@44 |
| 245/40R18 | 20657 | 97W | XL | 10 | 25.7 | 9.8 | 8.5 | 420 A A | 1609@50 |
| 245/45R18 | 20656 | 100W | XL | 10 | 26.7 | 9.6 | 8 | 420 A A | 1764@50 |
| 235/55R19 | 20655 | 105V | XL | 10 | 29.2 | 9.6 | 7.5 | 420 A A | 2039@50 |

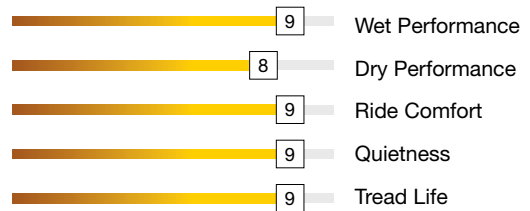

60,000 Mile Limited Treadwear Warranty

The ULTRAMAX A/S 2.0 is an exceptional all-season tire with the perfect balance of comfort and performance. Full-size offering with needed speed ratings from T to W for today's vehicles. Its design features four broad circumferential grooves, ensuring excellent wet traction. The wide footprint and notched center rib enhance stability and traction. ULTRAMAX A/S 2.0 guarantees both comfort and performance, coupled with a 60,000-mile tread life, ensuring peace of mind in all seasons.

TIRE FEATURES


- **BALANCED VARIABLE PITCH TREAD DESIGN:** Reduces road noise and assures a quiet comfortable cabin.
- **FULL-SIPED INNER TREAD BLOCKS:** Efficient water evacuation design promotes enhanced wet performance.
- **CENTER RIB WITH ANGLED SIPES:** Enhances traction while improving straight-line stability.





ULTRAMAX UHP AS

| Size | PART# | L.R. | TD | OD | SW | RW | UTQG | MAX LOAD |
|-----------|---------|------|--------|------|------|-----|---------|--------------|
| | | | 32/in. | in. | in. | in. | | lbs@psi (1X) |
| 205/45R16 | 1601662 | XL | 10 | 23.0 | 8.1 | 7.0 | 600 A A | 1201@50 |
| 205/50R16 | 1601663 | SL | 10 | 23.9 | 8.4 | 6.5 | 600 A A | 1201@44 |
| 205/55R16 | 1601675 | SL | 10 | 24.8 | 8.4 | 6.5 | 600 A A | 1356@44 |
| 215/55R16 | 1601681 | XL | 10 | 25.1 | 8.9 | 7.0 | 600 A A | 1609@50 |
| 235/45R17 | 1601644 | XL | 10 | 25.4 | 9.3 | 8.0 | 600 A A | 1609@50 |
| 245/40R17 | 1601648 | XL | 10 | 24.7 | 9.8 | 8.5 | 600 A A | 1521@50 |
| 245/45R17 | 1601649 | XL | 10 | 25.7 | 9.6 | 8.0 | 600 A A | 1709@50 |
| 225/45R17 | 1601651 | SL | 10 | 25.0 | 8.9 | 7.5 | 600 A A | 1356@44 |
| 235/50R17 | 1601657 | XL | 10 | 26.3 | 9.7 | 7.5 | 600 A A | 1764@50 |
| 235/55R17 | 1601658 | XL | 10 | 27.2 | 9.7 | 7.5 | 600 A A | 1929@50 |
| 225/55R17 | 1601669 | XL | 10 | 26.8 | 9.2 | 7.0 | 600 A A | 1819@50 |
| 225/50R17 | 1601673 | XL | 10 | 25.9 | 9.2 | 7.0 | 600 A A | 1653@50 |
| 205/45R17 | 1601674 | XL | 10 | 24.1 | 8.1 | 7.0 | 600 A A | 1235@50 |
| 215/45R17 | 1601676 | XL | 10 | 24.5 | 8.4 | 7.0 | 600 A A | 1356@50 |
| 215/50R17 | 1601678 | SL | 10 | 25.4 | 8.9 | 7.0 | 600 A A | 1356@44 |
| 215/55R17 | 1601679 | XL | 10 | 26.1 | 8.9 | 7.0 | 600 A A | 1653@50 |
| 205/50R17 | 1601680 | XL | 10 | 25.0 | 8.4 | 6.5 | 600 A A | 1433@50 |
| 225/55R18 | 1601634 | XL | 10 | 27.8 | 9.2 | 7.0 | 600 A A | 1874@50 |
| 235/50R18 | 1601645 | SL | 10 | 27.3 | 9.7 | 7.5 | 600 A A | 1609@44 |
| 245/45R18 | 1601650 | XL | 10 | 26.7 | 9.6 | 8.0 | 600 A A | 1764@50 |
| 235/55R18 | 1601653 | XL | 10 | 28.2 | 9.7 | 7.5 | 600 A A | 1984@50 |
| 225/50R18 | 1601654 | XL | 10 | 26.9 | 9.2 | 7.0 | 600 A A | 1709@50 |
| 225/40R18 | 1601661 | XL | 10 | 24.9 | 9.1 | 8.0 | 600 A A | 1389@50 |
| 215/45R18 | 1601664 | XL | 10 | 25.5 | 8.4 | 7.0 | 600 A A | 1433@50 |
| 245/40R18 | 1601665 | XL | 10 | 25.7 | 9.8 | 8.5 | 600 A A | 1609@50 |
| 245/55R18 | 1601666 | XL | 10 | 28.6 | 10.0 | 7.5 | 600 A A | 2149@50 |
| 255/35R18 | 1601667 | SL | 10 | 25.0 | 10.2 | 9.0 | 600 A A | 1323@44 |
| 235/40R18 | 1601671 | XL | 10 | 25.4 | 9.5 | 8.5 | 600 A A | 1521@50 |
| 235/45R18 | 1601672 | XL | 10 | 26.3 | 9.3 | 8.0 | 600 A A | 1653@50 |
| 225/45R18 | 1601682 | XL | 10 | 25.9 | 8.9 | 7.5 | 600 A A | 1521@50 |
| 235/55R19 | 1601630 | XL | 10 | 29.2 | 9.7 | 7.5 | 600 A A | 2039@50 |
| 245/40R19 | 1601631 | XL | 10 | 26.7 | 9.8 | 8.5 | 600 A A | 1653@50 |
| 255/40R19 | 1601633 | XL | 10 | 27.1 | 10.2 | 9.0 | 600 A A | 1764@50 |
| 225/55R19 | 1601635 | XL | 10 | 28.8 | 9.2 | 7.0 | 600 A A | 1929@50 |
| 245/45R19 | 1601637 | XL | 10 | 27.7 | 9.6 | 8.0 | 600 A A | 1874@50 |
| 245/50R19 | 1601639 | SL | 10 | 28.7 | 10.0 | 7.5 | 600 A A | 1819@44 |
| 275/40R19 | 1601640 | SL | 10 | 27.7 | 10.9 | 7.5 | 600 A A | 1819@44 |
| 255/35R19 | 1601642 | XL | 10 | 26.0 | 10.2 | 9.0 | 600 A A | 1565@50 |
| 255/45R19 | 1601643 | XL | 10 | 28.1 | 10.0 | 8.5 | 600 A A | 1984@50 |
| 235/50R19 | 1601646 | XL | 10 | 28.3 | 9.7 | 7.5 | 600 A A | 1929@50 |
| 235/40R19 | 1601655 | SL | 10 | 26.4 | 9.5 | 8.5 | 600 A A | 1389@44 |
| 225/45R19 | 1601656 | SL | 10 | 27.0 | 8.9 | 7.5 | 600 A A | 1389@44 |
| 235/35R19 | 1601670 | XL | 10 | 25.5 | 9.5 | 8.5 | 600 A A | 1356@50 |
| 225/40R19 | 1601677 | XL | 10 | 25.9 | 9.1 | 8.0 | 600 A A | 1433@50 |
| 245/35R19 | 1601683 | XL | 10 | 25.8 | 9.8 | 8.5 | 600 A A | 1433@50 |
| 245/40R20 | 1601632 | XL | 10 | 27.7 | 9.8 | 8.5 | 600 A A | 1709@50 |
| 255/40R20 | 1601636 | XL | 10 | 28.0 | 10.2 | 9.0 | 600 A A | 1819@50 |
| 245/45R20 | 1601638 | XL | 10 | 28.7 | 9.6 | 8.0 | 600 A A | 1929@50 |
| 245/50R20 | 1601641 | XL | 10 | 29.7 | 10.0 | 7.5 | 600 A A | 2039@50 |
| 245/35R20 | 1601647 | XL | 10 | 26.8 | 9.8 | 8.5 | 600 A A | 1521@50 |
| 235/55R20 | 1601652 | SL | 10 | 30.2 | 9.7 | 7.5 | 600 A A | 1874@44 |
| 255/45R20 | 1601659 | XL | 10 | 29.1 | 10.0 | 8.5 | 600 A A | 2039@50 |
| 275/35R20 | 1601660 | XL | 10 | 27.6 | 10.9 | 9.5 | 600 A A | 1874@50 |
| 275/40R20 | 1601668 | XL | 10 | 28.7 | 10.9 | 9.5 | 600 A A | 2094@50 |

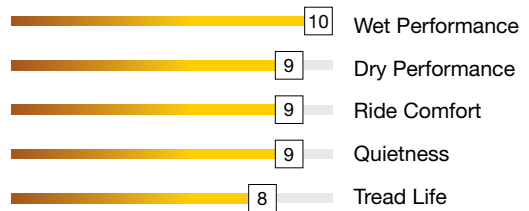

50,000 Mile Limited Treadwear Warranty
V,W and Y SPEED RATINGS, 600 A A UTQG

Crafted with state-of-the-art materials and an innovative design, the SUMMIT ULTRAMAX UHP AS tire delivers excellent durability, superior traction, stability, and reduced noise. Whether for daily commutes or long-distance drives, this tire offers reliable, high-performance comfort.

TIRE FEATURES

- **Premium Structural Integrity:** a reinforced belt ply structure ensures tread rigidity and stability at high speeds.
- **Advanced Sidewall Engineering:** the optimized sidewall design absorbs road impacts and vibrations, offering an unparalleled level of comfort for an ultra-high performance all-season tire.
- **Noise-Reduction Technology:** innovative asymmetric tread pattern, with carefully placed tread blocks, reduces road noise and provides excellent cornering stability.






TRAIL CLIMBER SUV²



| Size | PART# | LI/SR | L.R. | T.D. | OD | SW | RW | UTQG | MAX LOAD | MAX LOAD |
|-----------|-------|-------|------|-------|------|------|------|---------|--------------|--------------|
| | | | | 32nds | in. | in. | in. | | lbs@psi (1X) | lbs@psi (2X) |
| 215/65R16 | 20663 | 98H | | 10 | 27 | 8.7 | 6.5 | 700 A A | 1653@44 | |
| 215/70R16 | 20690 | 100H | | 10 | 27.9 | 8.7 | 6.5 | 700 A A | 1764@44 | |
| 235/60R16 | 20664 | 100H | | 10 | 27.1 | 9.4 | 7 | 700 A A | 1764@44 | |
| 245/70R16 | 20665 | 107T | | 10 | 29.5 | 9.8 | 7 | 700 A A | 2149@44 | |
| 255/70R16 | 20667 | 111H | | 10 | 30.1 | 10.2 | 7.5 | 700 A A | 2403@44 | |
| 265/70R16 | 20666 | 112H | | 10 | 30.6 | 10.7 | 8 | 700 A A | 2469@44 | |
| 215/60R17 | 20681 | 96H | | 10 | 27.2 | 8.7 | 6.5 | 700 A A | 1565@44 | |
| 225/55R17 | 20662 | 97V | | 10 | 26.8 | 9.2 | 7 | 700 A A | 1609@44 | |
| 225/60R17 | 20679 | 99H | | 10 | 27.6 | 9 | 6.5 | 700 A A | 1709@44 | |
| 225/65R17 | 10454 | 102H | | 10 | 28.5 | 9 | 6.5 | 700 A A | 1874@44 | |
| 235/55R17 | 20680 | 99V | | 10 | 27.2 | 9.6 | 7.5 | 700 A A | 1709@44 | |
| 235/60R17 | 20684 | 102H | | 10 | 28.1 | 9.4 | 7 | 700 A A | 1874@44 | |
| 235/65R17 | 20675 | 104H | | 10 | 29.1 | 9.4 | 7 | 700 A A | 1984@44 | |
| 245/65R17 | 20685 | 107H | | 10 | 29.5 | 9.8 | 7 | 700 A A | 2149@44 | |
| 255/60R17 | 20683 | 106H | | 10 | 29.1 | 10.2 | 7.5 | 700 A A | 2094@44 | |
| 265/65R17 | 20682 | 112H | | 10 | 30.6 | 10.7 | 8 | 700 A A | 2469@44 | |
| 215/55R18 | 20693 | 95H | | 10 | 27.3 | 8.9 | 7 | 700 A A | 1521@44 | |
| 225/55R18 | 20686 | 98V | | 10 | 27.8 | 9.2 | 7 | 700 A A | 1653@44 | |
| 225/60R18 | 20671 | 100H | | 10 | 28.6 | 9 | 6.5 | 700 A A | 1764@44 | |
| 235/50R18 | 20677 | 97V | | 10 | 27.3 | 9.6 | 7.5 | 700 A A | 1609@44 | |
| 235/55R18 | 20687 | 100V | | 10 | 28.1 | 9.6 | 7.5 | 700 A A | 1764@44 | 2470@80 |
| 235/60R18 | 20670 | 107V | XL | 10 | 29.1 | 9.4 | 7 | 700 A A | 2149@50 | 2470@80 |
| 235/65R18 | 20688 | 106H | | 10 | 30 | 9.4 | 7 | 700 A A | 2094@44 | 2778@80 |
| 245/60R18 | 20696 | 105H | | 10 | 29.6 | 9.8 | 7 | 700 A A | 2039@44 | 2778@80 |
| 255/55R18 | 20672 | 109V | XL | 10 | 29 | 10.4 | 8 | 700 A A | 2271@50 | 3085@80 |
| 255/65R18 | 20698 | 111T | | 10 | 31.1 | 10.2 | 7.5 | 700 A A | 2403@44 | 2835@80 |
| 265/60R18 | 20691 | 110H | | 10 | 30.5 | 10.7 | 8 | 700 A A | 2337@44 | 2910@80 |
| 225/55R19 | 20702 | 99V | | 10 | 28.8 | 9.2 | 7 | 700 A A | 1709@44 | 2910@80 |
| 235/45R19 | 20674 | 95V | | 10 | 27.4 | 9.3 | 8 | 700 A A | 1521@44 | 3195@80 |
| 235/50R19 | 20692 | 103V | XL | 10 | 28.3 | 9.6 | 7.5 | 700 A A | 1929@50 | 2998@83 |
| 235/55R19 | 20689 | 105V | XL | 10 | 29.2 | 9.6 | 7.5 | 700 A A | 2039@50 | 3085@80 |
| 245/55R19 | 20697 | 103V | | 10 | 29.6 | 10 | 7.5 | 700 A A | 1929@44 | 3305@80 |
| 255/50R19 | 20676 | 107V | XL | 10 | 29.1 | 10.4 | 8 | 700 A A | 2149@50 | 3415@80 |
| 255/55R19 | 20673 | 111V | XL | 10 | 30 | 10.4 | 8 | 700 A A | 2403@50 | |
| 255/60R19 | 20699 | 109H | | 10 | 31.1 | 10.2 | 7.5 | 700 A A | 2271@44 | |
| 265/50R19 | 20695 | 110V | XL | 10 | 29.5 | 10.9 | 8.5 | 700 A A | 2337@50 | |
| 235/55R20 | 20705 | 105V | XL | 10 | 30.2 | 9.6 | 7.5 | 700 A A | 2039@50 | |
| 245/50R20 | 20706 | 102V | | 10 | 29.7 | 10 | 7.5 | 700 A A | 1874@44 | |
| 245/60R20 | 20708 | 107H | | 10 | 31.6 | 9.8 | 7 | 700 A A | 2149@44 | |
| 255/50R20 | 20668 | 109V | XL | 10 | 30.1 | 10.4 | 8 | 700 A A | 2271@50 | |
| 255/55R20 | 20700 | 110V | XL | 10 | 31 | 10.4 | 8 | 700 A A | 2337@50 | |
| 265/50R20 | 20669 | 107H | | 10 | 30.5 | 10.9 | 8.5 | 700 A A | 2149@44 | |
| 275/40R20 | 20678 | 106W | XL | 10 | 28.7 | 10.9 | 9.5 | 700 A A | 2094@50 | |
| 265/40R21 | 20701 | 105W | XL | 10 | 29.3 | 10.7 | 9.5 | 700 A A | 2039@50 | |
| 275/40R21 | 20704 | 107W | XL | 10 | 29.6 | 10.9 | 9.5 | 700 A A | 2149@50 | |
| 275/45R21 | 20703 | 110W | XL | 10 | 30.7 | 10.7 | 9 | 700 A A | 2337@50 | |
| 285/40R21 | 20709 | 109W | XL | 10 | 30 | 11.4 | 10 | 700 A A | 2271@50 | |
| 295/35R21 | 20694 | 107W | XL | 10 | 29.1 | 11.9 | 10.5 | 700 A A | 2149@50 | |
| 315/40R21 | 20707 | 115W | XL | 10 | 30.9 | 12.6 | 11 | 700 A A | 2679@50 | |

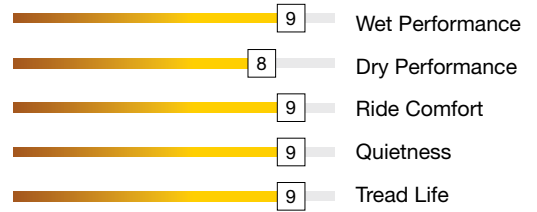

Loading up the SUV for an adventure or part of your daily routine the TRAIL CLIMBER SUV² can be trusted no matter where the road takes you. Modern tread design, with enhanced rubber compounds, reduces road noise while providing excellent handling and traction. Whether your drive has a purpose or just the thrill of the open road is calling, the TRAIL CLIMBER SUV² assures tranquil and secure travel on all routes.

TIRE FEATURES

- **RIDE COMFORT:** SPPS noise simulation technology optimizes tread lug arrangement minimizing road noise.
- **TRACTION:** Enhanced wet handling is aided by wide circumferential grooves working together with shoulder lateral grooves.
- **TREAD LIFE:** Wide footprint with optimized shoulder profile provides stable tread contact and promotes even wear.

60,000 Mile Limited Treadwear Warranty






TRAIL CLIMBER HT03

The Trail Climber HT03 is Summit's premium HT (Highway) All-Season tire. Designed to provide outstanding handling and braking performance, packaged with a smooth drive for pickup trucks, large SUV's and 4X4's. Guaranteed to endure and go the distance, backed by Summit's trustworthy reputation and warranty.

TIRE FEATURES

- **Enhanced Traction:** Multiple 3D siping on the tread contact patch with 4 circumferential channels ensure water displacement and reliable traction in all road conditions.
- **Trusted Durability:** Reinforced tire casing construction promotes durable even tread wear and reliable load carrying capacity.
- **Proven Comfort:** Void angles and lateral groove tie bars are designed to create smooth airflow and increase handling stability.

50,000 Mile Limited Treadwear Warranty - LT sizes
60,000 Mile Limited Treadwear Warranty - P-metric sizes

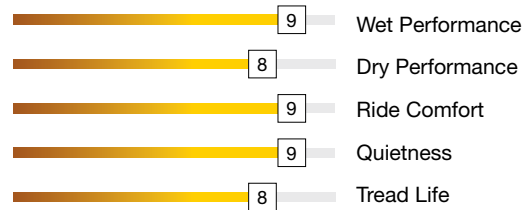

| Size | PART# | LI/SR | L.R. | T.D. | | SW | RW | UTQG | MAX LOAD | |
|--------------------------|-------|----------|------|-------|-------|------|-----|---------|--------------|--------------|
| | | | | 32nds | in. | | | | lbs@psi (1X) | lbs@psi (2X) |
| 235/75R15 | 20727 | 105T | | 11 | 28.86 | 9.3 | 6.0 | 700 A B | 2039@44 | |
| 235/70R16 | 20726 | 106T | | 11 | 28.98 | 9.5 | 7.0 | 700 A B | 2094@44 | |
| 245/70R16 | 20730 | 107T | | 11 | 29.53 | 9.8 | 7.0 | 700 A B | 2149@44 | |
| 245/75R16 | 20732 | 111T | | 11 | 30.47 | 9.8 | 7.0 | 700 A B | 2403@44 | |
| 255/70R16 | 20733 | 111T | | 11 | 30.08 | 10.2 | 7.5 | 700 A B | 2403@44 | |
| 265/70R16 | 20739 | 112T | | 11 | 30.63 | 10.7 | 8.0 | 700 A B | 2469@44 | |
| 265/75R16 | 20742 | 116T | | 11 | 31.65 | 10.5 | 7.5 | 700 A B | 2756@44 | |
| 235/75R17 | 20728 | 109T | | 11 | 30.87 | 9.3 | 6.5 | 700 A B | 2271@44 | |
| 245/65R17 | 20729 | 107T | | 11 | 29.53 | 9.8 | 7.0 | 700 A B | 2149@44 | |
| 245/70R17 | 20731 | 110T | | 11 | 30.55 | 9.8 | 7.0 | 700 A B | 2337@44 | |
| 265/65R17 | 20737 | 112S | | 11 | 30.55 | 10.7 | 8.0 | 700 A B | 2469@44 | |
| 265/70R17 | 20740 | 115T | | 11 | 31.65 | 10.7 | 8.0 | 700 A B | 2679@44 | |
| 255/70R18 | 20734 | 113T | | 11 | 32.09 | 10.2 | 7.5 | 700 A B | 2535@44 | |
| 265/60R18 | 20736 | 110H | | 11 | 30.51 | 10.7 | 8.0 | 700 A A | 2337@44 | |
| 265/65R18 | 20738 | 114T | | 11 | 31.54 | 10.7 | 8.0 | 700 A B | 2601@44 | |
| 265/70R18 | 20741 | 116T | | 11 | 32.64 | 10.7 | 8.0 | 700 A B | 2756@44 | |
| 275/65R18 | 20745 | 116T | | 11 | 32.09 | 11.0 | 8.0 | 700 A B | 2756@44 | |
| 265/50R20 | 20735 | 107V | | 11 | 30.47 | 10.9 | 8.5 | 700 A A | 2149@44 | |
| 275/55R20 | 20743 | 117T | XL | 11 | 31.89 | 11.2 | 8.5 | 700 A A | 2833@50 | |
| 275/60R20 | 20744 | 115T | | 11 | 32.99 | 11.0 | 8.0 | 700 A A | 2679@44 | |
| 285/45R22 | 20746 | 114H | XL | 11 | 32.09 | 11.2 | 9.5 | 700 A A | 2601@50 | |
| LT215/85R16 | 20747 | 115/112R | 10PR | 14 | 30.39 | 8.5 | 6.0 | | 2680@80 | 2470@80 |
| LT225/75R16 | 20748 | 115/112R | 10PR | 14 | 29.29 | 8.8 | 6.0 | | 2680@80 | 2470@80 |
| LT235/85R16 | 20750 | 120/116R | 10PR | 14 | 31.73 | 9.3 | 6.5 | | 3042@80 | 2778@80 |
| LT245/75R16 | 20752 | 120/116R | 10PR | 14 | 30.47 | 9.8 | 7.0 | | 3042@80 | 2778@80 |
| LT265/75R16 | 20756 | 123/120R | 10PR | 14 | 31.65 | 10.5 | 7.5 | | 3415@80 | 3085@80 |
| LT235/80R17 | 20749 | 120/117R | 10PR | 14 | 31.81 | 9.3 | 6.5 | | 3085@80 | 2835@80 |
| LT245/70R17 | 20751 | 119/116S | 10PR | 14 | 30.55 | 9.8 | 7.0 | | 3000@80 | 2755@80 |
| LT245/75R17 | 20753 | 121/118S | 10PR | 14 | 31.5 | 9.8 | 7.0 | | 3195@80 | 2910@80 |
| LT265/70R17 | 20754 | 123/120S | 10PR | 14 | 31.65 | 10.7 | 8.0 | | 3415@80 | 3085@80 |
| LT265/70R18 | 20755 | 124/121S | 10PR | 14 | 32.64 | 10.7 | 8.0 | | 3525@80 | 3195@80 |
| LT275/65R18 | 20757 | 123/120S | 10PR | 14 | 32.09 | 11.0 | 8.0 | | 3415@80 | 3085@80 |
| LT275/70R18 | 20759 | 125/122S | 10PR | 14 | 33.19 | 11.0 | 8.0 | | 3640@80 | 3305@80 |
| LT275/65R20 | 20758 | 126/123S | 10PR | 14 | 34.09 | 11.0 | 8.0 | | 3750@80 | 3415@80 |
| LMD - Last Mile Delivery | | | | | | | | | | |
| 195/75R16C | 20723 | 107/105R | 8PR | 13 | 27.4 | 7.7 | 5 | | 2150@69 | 2040@69 |
| 225/75R16C | 20724 | 121/120R | 10PR | 13 | 29.2 | 8.7 | 6 | | 3197@83 | 3086@83 |
| 235/65R16C | 20725 | 121/119R | 10PR | 13 | 28 | 9.4 | 7 | | 3197@83 | 2998@83 |


Treadwear warranty does not apply to LT/LMD tires.



TRAIL CLIMBER AT02



| Size | PART# | LI/SR | L.R. | T.D. | OD | SW | RW | UTQG | MAX LOAD | MAX LOAD |
|-------------|-------|----------|------|-------|-------|-------|-----|---------|--------------|--------------|
| | | | | 32nds | in. | in. | in. | | lbs@psi (1X) | lbs@psi (2X) |
| 235/75R15 | 20898 | 109S | XL | 13 | 28.86 | 9.25 | 6 | 620 A B | 2271@50 | |
| 235/70R16 | 20899 | 106S | | 13 | 28.98 | 9.45 | 7 | 620 A B | 2094@44 | |
| 245/75R16 | 20900 | 111S | | 13 | 30.47 | 9.76 | 7 | 620 A B | 2403@44 | |
| 265/70R16 | 20901 | 112T | | 13 | 30.63 | 10.71 | 8 | 620 A B | 2469@44 | |
| 265/75R16 | 20902 | 116S | | 13 | 31.65 | 10.51 | 8 | 620 A B | 2756@44 | |
| 235/65R17 | 20903 | 104S | | 13 | 29.06 | 9.45 | 7 | 620 A B | 1984@44 | |
| 245/65R17 | 20904 | 107S | | 13 | 29.53 | 9.76 | 7 | 620 A B | 2149@44 | |
| 245/70R17 | 20905 | 110T | | 13 | 30.55 | 9.76 | 7 | 620 A B | 2337@44 | |
| 255/65R17 | 20906 | 110T | | 13 | 30.08 | 10.24 | 8 | 620 A B | 2337@44 | |
| 265/65R17 | 20907 | 112S | | 13 | 30.55 | 10.71 | 8 | 620 A B | 2469@44 | |
| 265/70R17 | 20908 | 115S | | 13 | 31.65 | 10.71 | 8 | 620 A B | 2679@44 | |
| 265/65R18 | 20909 | 114T | | 13 | 31.54 | 10.71 | 8 | 620 A B | 2601@44 | |
| 265/70R18 | 20910 | 116T | | 13 | 32.64 | 10.71 | 8 | 620 A B | 2756@44 | |
| 275/65R18 | 20911 | 116T | | 13 | 32.09 | 10.98 | 8 | 620 A B | 2756@44 | |
| 275/55R20 | 20897 | 117T | XL | 13 | 31.89 | 11.18 | 9 | 620 A B | 2833@50 | |
| 265/50R20 | 20912 | 111T | XL | 13 | 30.47 | 10.91 | 9 | 620 A B | 2403@50 | |
| 275/60R20 | 20913 | 115T | | 13 | 32.99 | 10.98 | 8 | 620 A B | 2679@44 | |
| 285/45R22 | 20914 | 114H | XL | 13 | 32.09 | 11.22 | 10 | 620 A B | 2601@50 | |
| LT225/75R16 | 20921 | 115/112S | 10PR | 16 | 29.29 | 8.78 | 6 | | 2680@80 | 2470@80 |
| LT235/85R16 | 20922 | 120/116S | 10PR | 16 | 31.73 | 9.25 | 7 | | 3042@80 | 2778@80 |
| LT245/75R16 | 20923 | 120/116S | 10PR | 16 | 30.47 | 9.76 | 7 | | 3042@80 | 2778@80 |
| LT265/75R16 | 20924 | 123/120S | 10PR | 16 | 31.65 | 10.51 | 8 | | 3415@80 | 3085@80 |
| LT235/80R17 | 20925 | 120/117R | 10PR | 16 | 31.81 | 9.25 | 7 | | 3085@80 | 2835@80 |
| LT245/70R17 | 20926 | 119/116S | 10PR | 16 | 30.55 | 9.76 | 7 | | 3000@80 | 2755@80 |
| LT245/75R17 | 20927 | 121/118S | 10PR | 16 | 31.5 | 9.76 | 7 | | 3195@80 | 2910@80 |
| LT265/70R17 | 20928 | 123/120S | 10PR | 16 | 31.65 | 10.71 | 8 | | 3415@80 | 3085@80 |
| LT285/70R17 | 20929 | 126/123S | 10PR | 16 | 32.76 | 11.5 | 9 | | 3750@80 | 3415@80 |
| LT315/70R17 | TBD | 126/123S | 10PR | 16 | 34.41 | 12.72 | 10 | | 3750@65 | 3415@65 |
| LT265/70R18 | 20931 | 124/121S | 10PR | 16 | 32.64 | 10.71 | 8 | | 3525@80 | 3195@80 |
| LT275/65R18 | 20932 | 123/120R | 10PR | 16 | 32.09 | 10.98 | 8 | | 3415@80 | 3085@80 |
| LT275/70R18 | 20933 | 125/122R | 10PR | 16 | 33.19 | 10.98 | 8 | | 3640@80 | 3305@80 |
| LT265/60R20 | 20934 | 121/118R | 10PR | 16 | 32.52 | 10.71 | 8 | | 3195@80 | 2910@80 |
| LT275/55R20 | 20935 | 120/117R | 10PR | 16 | 31.89 | 11.18 | 9 | | 3085@80 | 2835@80 |
| LT275/60R20 | 20936 | 123/120R | 10PR | 16 | 32.99 | 10.98 | 8 | | 3415@80 | 3085@80 |
| LT275/65R20 | 20937 | 126/123R | 10PR | 16 | 34.09 | 10.98 | 8 | | 3750@80 | 3415@80 |
| LT285/60R20 | 20938 | 125/122R | 10PR | 16 | 33.46 | 11.5 | 9 | | 3640@80 | 3305@80 |
| LT305/55R20 | 20939 | 121/118R | 10PR | 16 | 33.23 | 12.44 | 10 | | 3195@65 | 2910@65 |
| 31X10.50R15 | 20915 | 109S | 6PR | 16 | 30.51 | 10.55 | 9 | | 2270@50 | |
| 35X12.50R17 | TBD | 125R | 10PR | 16 | 34.53 | 12.52 | 10 | | 3640@65 | |
| 33X12.50R18 | 20917 | 118S | 10PR | 16 | 32.52 | 12.52 | 10 | | 2910@65 | |
| 35X12.50R18 | 20918 | 123R | 10PR | 16 | 34.53 | 12.52 | 10 | | 3415@65 | |
| 33X12.50R20 | 20919 | 114S | 10PR | 16 | 32.52 | 12.52 | 10 | | 2600@65 | |
| 35X12.50R20 | 20920 | 121R | 10PR | 16 | 34.53 | 12.52 | 10 | | 3195@65 | |

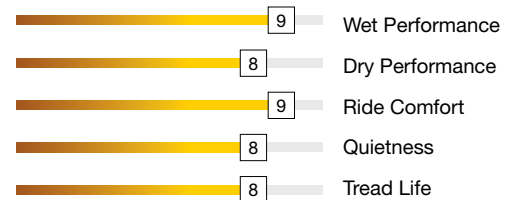

The Summit Trail Climber AT02 is your trusted all terrain tire for trucks and SUVs. The AT02 is just as at home on the trails as it is navigating the daily roads and highways. Reliable in all seasons, with deep tread and proudly wearing the 3PMS certification badge. Enjoy the Trail Climber AT02, as it ensures a smooth and quiet ride every time.

TIRE FEATURES

- Wide tread footprint, supported by reinforced shoulders, ensure even pressure distribution sustaining even wear for extended tread life.
- Functional scalloped shoulders with deep tread depths and enhanced sidewall biters guarantees ample traction when required
- Four circumferential grooves with lateral shoulder channels expedite water evacuation.

50,000 Mile Limited Treadwear Warranty
R, S AND T SPEED RATED UTQG 620 A B






TRAIL CLIMBER RT

The SUMMIT TRAIL CLIMBER RT provides reliable versatility while ensuring steadfast traction and stability across multiple terrains. From rugged trails to urban streets, the deep tread lugs and aggressive sidewall biters guarantee confidence and performance wherever the road leads.

TIRE FEATURES

- Deep stepped lug treads with scalloped shoulders and aggressive sidewall biters guarantee traction & protection from the elements when needed most.
- Engineered with proprietary rubber compound for on/off road use delivers unparalleled durability.
- 3PMS certified provides confident traction when the temperature drops.

45,000 Mile Limited Treadwear Warranty
S, T AND Q SPEED RATED, UTQG 600 A B

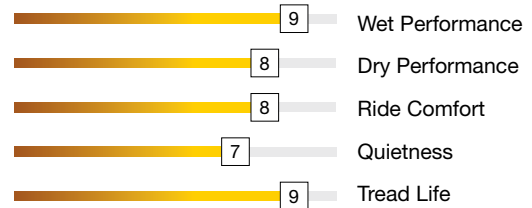

| Size | PART# | LI/SR | L.R. | T.D. | OD | SW | RW | UTQG | MAX LOAD | MAX LOAD |
|---------------|---------|----------|------|-------|------|------|-----|---------|--------------|--------------|
| | | | | 32nds | in. | in. | in. | | lbs@psi (1X) | lbs@psi (2X) |
| 265/70R17 | 1600698 | 115T | | 16 | 31.7 | 10.7 | 8 | 600 A B | 2679@44 | |
| 255/70R18 | 1600694 | 116T | XL | 16 | 32.1 | 10.2 | 8 | 600 A B | 2756@50 | |
| 265/60R18 | 1600696 | 114S | XL | 16 | 30.5 | 10.7 | 8 | 600 A B | 2601@50 | |
| 265/65R18 | 1600697 | 116T | XL | 16 | 31.5 | 10.7 | 8 | 600 A B | 2756@50 | |
| 265/70R18 | 1600699 | 116S | | 16 | 32.6 | 10.7 | 8 | 600 A B | 2756@44 | |
| 275/65R18 | 1600702 | 116T | XL | 16 | 32.1 | 11.0 | 8 | 600 A B | 2756@50 | |
| 265/50R20 | 1600695 | 111T | XL | 16 | 30.5 | 10.9 | 9 | 600 A B | 2403@50 | |
| 275/55R20 | 1600700 | 117T | XL | 16 | 31.9 | 11.2 | 9 | 600 A B | 2833@50 | |
| 275/60R20 | 1600701 | 116T | XL | 16 | 33.0 | 11.0 | 8 | 600 A B | 2756@50 | |
| 285/45R22 | 1600703 | 114Q | XL | 16 | 32.1 | 11.2 | 10 | 600 A B | 2601@50 | |
| LT245/70R17 | 1600704 | 119/116Q | 10PR | 18 | 30.6 | 9.8 | 7 | | 3000@80 | 2755@80 |
| LT245/75R17 | 1600705 | 121/118Q | 10PR | 18 | 31.5 | 9.8 | 7 | | 3195@80 | 2910@80 |
| LT265/70R17 | 1600707 | 123/120Q | 10PR | 18 | 31.7 | 10.7 | 8 | | 3415@80 | 3085@80 |
| LT285/70R17 | 1600714 | 126/123Q | 10PR | 18 | 32.8 | 11.5 | 9 | | 3750@80 | 3415@80 |
| LT265/65R18 | 1600706 | 122/119Q | 10PR | 18 | 31.5 | 10.7 | 8 | | 3305@80 | 3000@80 |
| LT265/70R18 | 1600708 | 124/121Q | 10PR | 18 | 32.6 | 10.7 | 8 | | 3525@80 | 3195@80 |
| LT275/65R18 | 1600711 | 123/120Q | 10PR | 18 | 32.1 | 11.0 | 8 | | 3415@80 | 3085@80 |
| LT275/70R18 | 1600713 | 125/122Q | 10PR | 18 | 33.2 | 11.0 | 8 | | 3640@80 | 3305@80 |
| LT275/55R20 | 1600709 | 120/117Q | 10PR | 18 | 31.9 | 11.2 | 9 | | 3085@80 | 2835@80 |
| LT275/60R20 | 1600710 | 123/120Q | 10PR | 18 | 33.0 | 11.0 | 8 | | 3415@80 | 3085@80 |
| LT275/65R20 | 1600712 | 126/123Q | 10PR | 18 | 34.1 | 11.0 | 8 | | 3750@80 | 3415@80 |
| LT305/55R20 | 1600715 | 125/122Q | 12PR | 18 | 33.2 | 12.4 | 10 | | 3640@80 | 3305@80 |
| 33X12.50R17LT | 1600716 | 120Q | 10PR | 18 | 32.5 | 12.5 | 10 | | 3085@65 | |
| 35X12.50R17LT | 1600720 | 125Q | 10PR | 18 | 34.5 | 12.5 | 10 | | 3640@65 | |
| 37X12.50R17LT | 1600725 | 124Q | 8PR | 18 | 36.5 | 12.5 | 10 | | 3525@50 | |
| 33X12.50R18LT | 1600717 | 122Q | 12PR | 18 | 32.5 | 12.5 | 10 | | 3305@80 | |
| 35X12.50R18LT | 1600721 | 128Q | 12PR | 18 | 34.5 | 12.5 | 10 | | 3970@80 | |
| 37X12.50R18LT | 1600726 | 128Q | 10PR | 18 | 36.5 | 12.5 | 10 | | 3970@65 | |
| 33X12.50R20LT | 1600718 | 119Q | 12PR | 18 | 32.5 | 12.5 | 10 | | 3000@80 | |
| 35X12.50R20LT | 1600722 | 125Q | 12PR | 18 | 34.5 | 12.5 | 10 | | 3640@80 | |
| 35X13.50R20LT | 1600724 | 126Q | 12PR | 18 | 34.5 | 13.6 | 11 | | 3750@80 | |
| 37X12.50R20LT | 1600727 | 126Q | 10PR | 18 | 36.5 | 12.5 | 10 | | 3750@65 | |
| 33X12.50R22LT | 1600719 | 114Q | 12PR | 18 | 32.5 | 12.5 | 10 | | 2600@80 | |
| 35X12.50R22LT | 1600723 | 121Q | 12PR | 18 | 34.5 | 12.5 | 10 | | 3195@80 | |
| 37X12.50R22LT | 1600728 | 127Q | 12PR | 18 | 36.5 | 12.5 | 10 | | 3860@80 | |
| 37X13.50R22LT | 1600729 | 128Q | 12PR | 18 | 36.5 | 13.6 | 11 | | 3970@80 | |



TRAIL CLIMBER LMD



The last mile delivery industry with confidence using the SUMMIT trail climber LMD. Constantly in motion, this demanding sector requires tires that can handle every twist, stop, and acceleration. SUMMIT rises to the challenge, crafting the dependable and long-lasting TRAIL CLIMBER LMD with these demands in mind

TIRE FEATURES

- Durable casing is specifically designed to meet the demanding standards of commercial applications.
- Deep tread depth and cutting-edge rubber compounds, it delivers exceptional wear resistance, extending the lifespan of your tires.
- Enhanced by four wide circumferential grooves, it excels in wet conditions, providing superior traction for safer driving.

| Tire size | PART# | LI/SR | L.R. | T.D. 32nds | O.D. in. | S.W. in. | R.W. in. | LCC (1x) lbs@psi | LCC (2x) lbs@psi |
|-------------------|-------|----------|------|---------------|-------------|-------------|-------------|---------------------|---------------------|
| 195/75R16C | 20723 | 107/105R | 8PR | 13 | 27.4 | 7.7 | 5 | 2150@69 | 2040@69 |
| 225/75R16C | 20724 | 121/120R | 10PR | 13 | 29.2 | 8.7 | 6 | 3197@83 | 3086@83 |
| 235/65R16C | 20725 | 121/119R | 10PR | 13 | 28 | 9.4 | 7 | 3197@83 | 2998@83 |

Treadwear warranty does not apply to LT/LMD tires.





HI ROAD ST


The Hi Road ST is an ST tire designed for towed trailer applications. With its radial construction, the Hi Road ST is engineered to deliver long life and superior towing stability.

TIRE FEATURES

- Radial construction provides strength and durability
- Tread is designed to reduce excessive heat build up
- Tread pattern delivers a stable and quiet ride
- Rubber compound engineered to provide low rolling resistance
- Nylon overlay on 15" and 16" sizes.



| Tire size | PART# | LI/SR | LI/SR | PLY | T.D. | O.D. | S.W. | R.W. | LCC (1x) | LCC (2x) |
|--------------------|---------|---------|----------|-----|-------|------|------|------|----------|----------|
| | | | | | 32nds | in. | in. | in. | | |
| ST175/80R13 | ST1-922 | ST1-922 | 91/87L | 6 | 10 | 24.0 | 7.0 | 5.00 | 1355@50 | 1200@50 |
| ST185/80R13 | ST1-923 | ST1-923 | 94/89L | 6 | 10 | 24.6 | 7.2 | 5.00 | 1475@50 | 1280@50 |
| ST205/75R14 | ST1-930 | ST1-930 | 100/96L | 6 | 10 | 26.1 | 8.0 | 5.50 | 1760@50 | 1565@50 |
| ST215/75R14 | ST1-932 | ST1-932 | 102/98L | 6 | 10 | 26.7 | 8.5 | 6.00 | 1870@50 | 1650@50 |
| ST205/75R15 | ST1-943 | ST1-943 | 107/102L | 8 | 10 | 27.1 | 8.0 | 5.50 | 2150@65 | 1870@65 |
| ST225/75R15 | ST1-947 | ST1-947 | 117/112L | 10 | 10 | 28.3 | 8.8 | 6.00 | 2830@80 | 2470@80 |
| ST235/80R16 | ST1-961 | ST1-961 | 124/120L | 10 | 10 | 30.7 | 9.2 | 6.50 | 3520@80 | 3080@80 |
| ST235/85R16 | ST1-970 | ST1-970 | 125/121L | 10 | 10 | 31.7 | 9.2 | 6.50 | 3640@80 | 3200@80 |

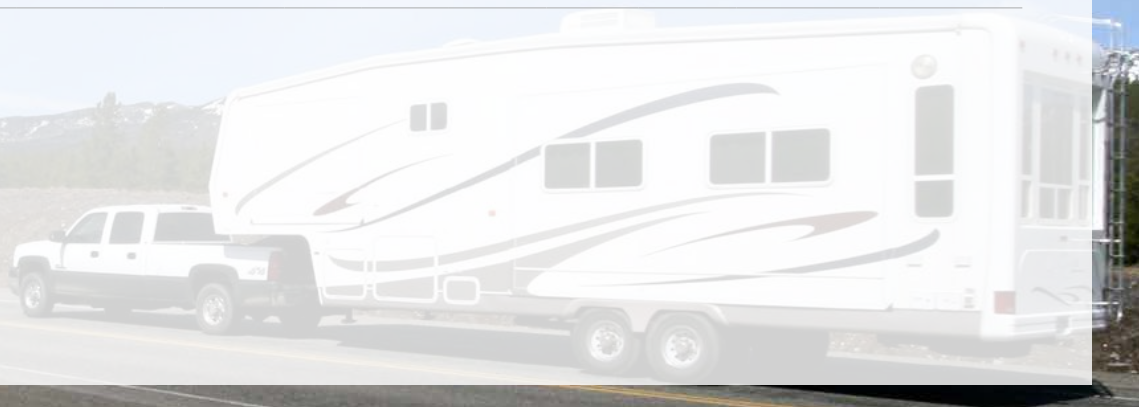



USA LIMITED WARRANTY

PASSENGER & LIGHT TRUCK TIRES

This Limited Warranty / Adjustment Policy provides for tire replacement under specified conditions. This policy applies to SUMMIT tires used in normal highway service (commercial applications excluded) displaying warrantable conditions. Tires that become unserviceable or wear out because of neglect or mistreatment are excluded from SUMMIT warranty coverage.

THIS IS THE ONLY EXPRESSED WARRANTY MADE BY SAILUN TIRE AMERICAS NO EMPLOYEE, RETAILER, DEALER, OR REPRESENTATIVE HAS THE AUTHORITY TO MAKE ANY WARRANTY, REPRESENTATION, PROMISE OR AGREEMENT THAT IN ANY WAY VARIES THE TERMS OR CONDITIONS SET FORTH IN THIS LIMITED WARRANTY.

WARRANTY ELIGIBILITY

This warranty applies to every SUMMIT replacement passenger car or light truck tire bearing the SUMMIT brand name and complete Department of Transportation serial identification number while operated in normal highway use (commercial applications excluded) in the USA. These tires are covered by this warranty for the life of the original usable tread depth (the original tread depth down to the level of tread wear indicators molded at 2/32 inch) within 60 months from the date of purchase (proof of purchases required), or if proof of purchase is not available, the coverage will be 60 months from the date of manufacture. This warranty applies only to the original tire purchaser, and is not transferrable to any other party. This time period does not represent the expected service life for tires covered by this warranty.

WHAT IS NOT WARRANTED

Tires that have become unserviceable for the following reasons:

- Improper repairs or repairs that have failed. Improper repairs will void this Limited Warranty.
- Improper maintenance which can include: improper inflation or other maintenance abuses.
- Improper application or operations such as speeding, improper tire size and / or specification.
- Improper mounting / dismounting procedures, tire/wheel assembly imbalance.


- Mechanical irregularities in the vehicle or wheel, such as bent wheel assemblies, misalignment, worn or faulty components.
- Weather checking/cracking or failures after four years (60 months) from the date of manufacture.
- Accident, corrosion, vandalism, fire or damages caused by contamination by petroleum or other chemical products.
- Tires used in commercial applications such as taxis, shuttle vehicles and couriers.
- Irregular tread wear, or worn-out (beyond 2/32nds remaining tread depth) is not covered under the SUMMIT Limited Warranty
- Road hazard injuries or damages caused by obstacles or debris, such as cuts, punctures (whether repairable or not), snags, bruises, tears, abrasions or impact breaks (whether repairable or not), etc.

ADDITIONAL EXCLUSIONS

- Materials added such as fillers, sealants, balancing substances and external tire treatments. If the added material is the cause of a failure the warranty will be deemed as void.
 - Tires submitted for ride disturbance complaints after 25% (2/32") tread wear.
 - Tires on vehicles registered or operated outside of the USA.
 - Tires not purchased in the USA through the Sailun Tire Americas distribution channel.
 - Tires purchased as used.
 - Tires branded by SUMMIT to note special classification at time of purchase, such as "NA" (non-adjustable), or tires altered by notching or buffing.
 - Tires used on vehicles in racing or special applications.
 - Tires rendered unserviceable due to snow chains or studs.
 - Flat spotting due to improper storage or caused by brake lock.
 - SUMMIT products produced prior to January 1, 2013.
- * Note: Consequential damage mentioned above may not apply to you based on individual State limitations.

WHAT IS WARRANTED

Tires that have become unserviceable for reasons other than stated above, within 48 months of the date of manufacturer or 60 months from the date of purchase (proof of purchase required) during its useable tread life, the tires will be replaced in accordance with this warranty.

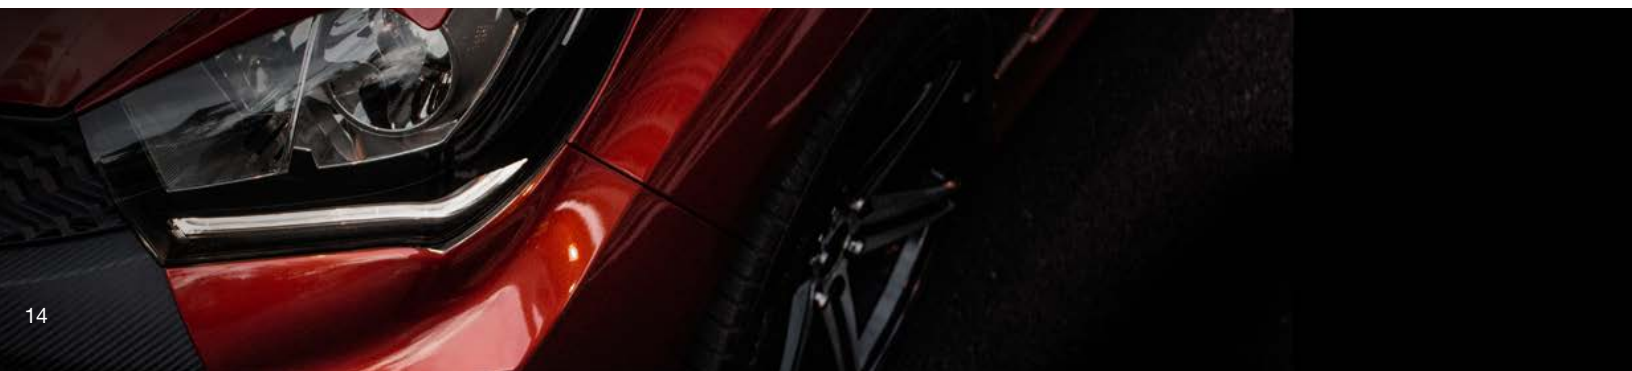



**MODEL DEFECTS
LIMITED MILEAGE WARRANTY**

| Model | Defects/ Materials | # Months | Tread Life Protection | Miles/ Months |
|------------------------------------|-----------------------|----------|--------------------------|------------------|
| ULTRAMAX A/S 2.0 | Yes | 60 | Yes | 60K/60 |
| ULTRAMAX UHP AS | Yes | 60 | Yes | 50K/60 |
| TRAIL CLIMBER SUV ² | Yes | 60 | Yes | 60K/60 |
| TRAIL CLIMBER HT03: LT SIZES | Yes | 60 | Yes | 50K/60 |
| TRAIL CLIMBER HT03: P-METRIC SIZES | Yes | 60 | Yes | 60K/60 |
| TRAIL CLIMBER AT02 | Yes | 60 | Yes | 50K/60 |
| TRAIL CLIMBER RT | Yes | 60 | Yes | 45K/60 |
| TRAIL CLIMBER LMD | YES | - | - | - |
| HI ROAD ST | YES | 60 | NO | - |

Note: All tire models, staggered fitment vehicles have half mileage for rear tires if different size than the front tires

Select SUMMIT tires are assigned a Limited Mileage Warranty that protects the consumer against premature tread wear. If a tire reaches the end of its “usable tread life” before the stated mileage protection, the consumer will be issued a replacement SUMMIT tire on a prorated basis, which means the consumer will be responsible for a percentage of the replacement cost. In order to maintain limited mileage protection, all tires must be properly inflated, balanced, rotated and aligned as recommended by vehicle manufacturer. All claims must be accompanied by the original purchase invoice as well as invoices for all on time services provided. Under all circumstances, the cost of mounting, balancing and any other service charges including applicable taxes, disposal fees are required to be paid by the consumer.

APPROVED TIRE ROTATION INTERVALS AND PATTERNS

The purpose of regularly rotating tires is to prolong their useful life by achieving more uniform wear for all tires on a vehicle. Before rotating tires, always consult the owner’s manual for rotation recommendations for specific vehicles. If no rotation period is specified, tires should be rotated, at minimum, every 6,000 miles or at any sign of uneven wear. The first rotation is the most important. Rotating the tires as recommended by the vehicle or

tire manufacturer will help even out the amount of wear on each tire and extend the life of the entire set. Such tires include: “Temporary Use Spares”, unidirectional tires and tires with asymmetric tread designs. Also, some vehicles may have different sized tires mounted on the front and rear axles, and these different sized tires have rotation restrictions. Check the owner’s manual for the proper rotation recommendations for these special cases. When tires are rotated, the inflation pressures must be adjusted for the tires’ new positions in accordance with the actual loads on that wheel position and the vehicle manufacturer’s recommendations. Underinflated or overinflated tires may result in poor handling, uneven tread wear, and increased fuel consumption. If the tires show uneven wear, ask the service person to check for and correct any misalignment, imbalance, or other mechanical problem before rotation.

ADJUSTMENT POLICY

Passenger and Light Truck Tires When the original usable tread is worn 25% (2/32”) or less, and a warrantable condition is found, the tire will be replaced with a comparable new SUMMIT tire free of charge. Replacement tires will be mounted and balanced at the vehicle owner’s expense. Other service charges such as tire rotation, alignment or applicable taxes are payable by the customer. When a tire has worn past the above specified period for free replacement and a warrantable condition is found, the customer must pay for the cost of a new comparable SUMMIT passenger or light truck tire on a prorated basis. The dealer shall determine this cost by multiplying the percentage of usable tread worn by the current retail selling price (Suggested Retail Price x 80%) of that tire at the time of warranty replacement. The cost of mounting, balancing and any other service charges or applicable taxes are payable by the customer.


MANDATORY TIRE REGISTRATION

For tires purchased in the USA, please register your tires at: www.summittiresusa.com

Rev 9.24U

ALL SUMMIT TIRE WARRANTIES MUST BE SUBMITTED THROUGH THE POINT OF PURCHASE.



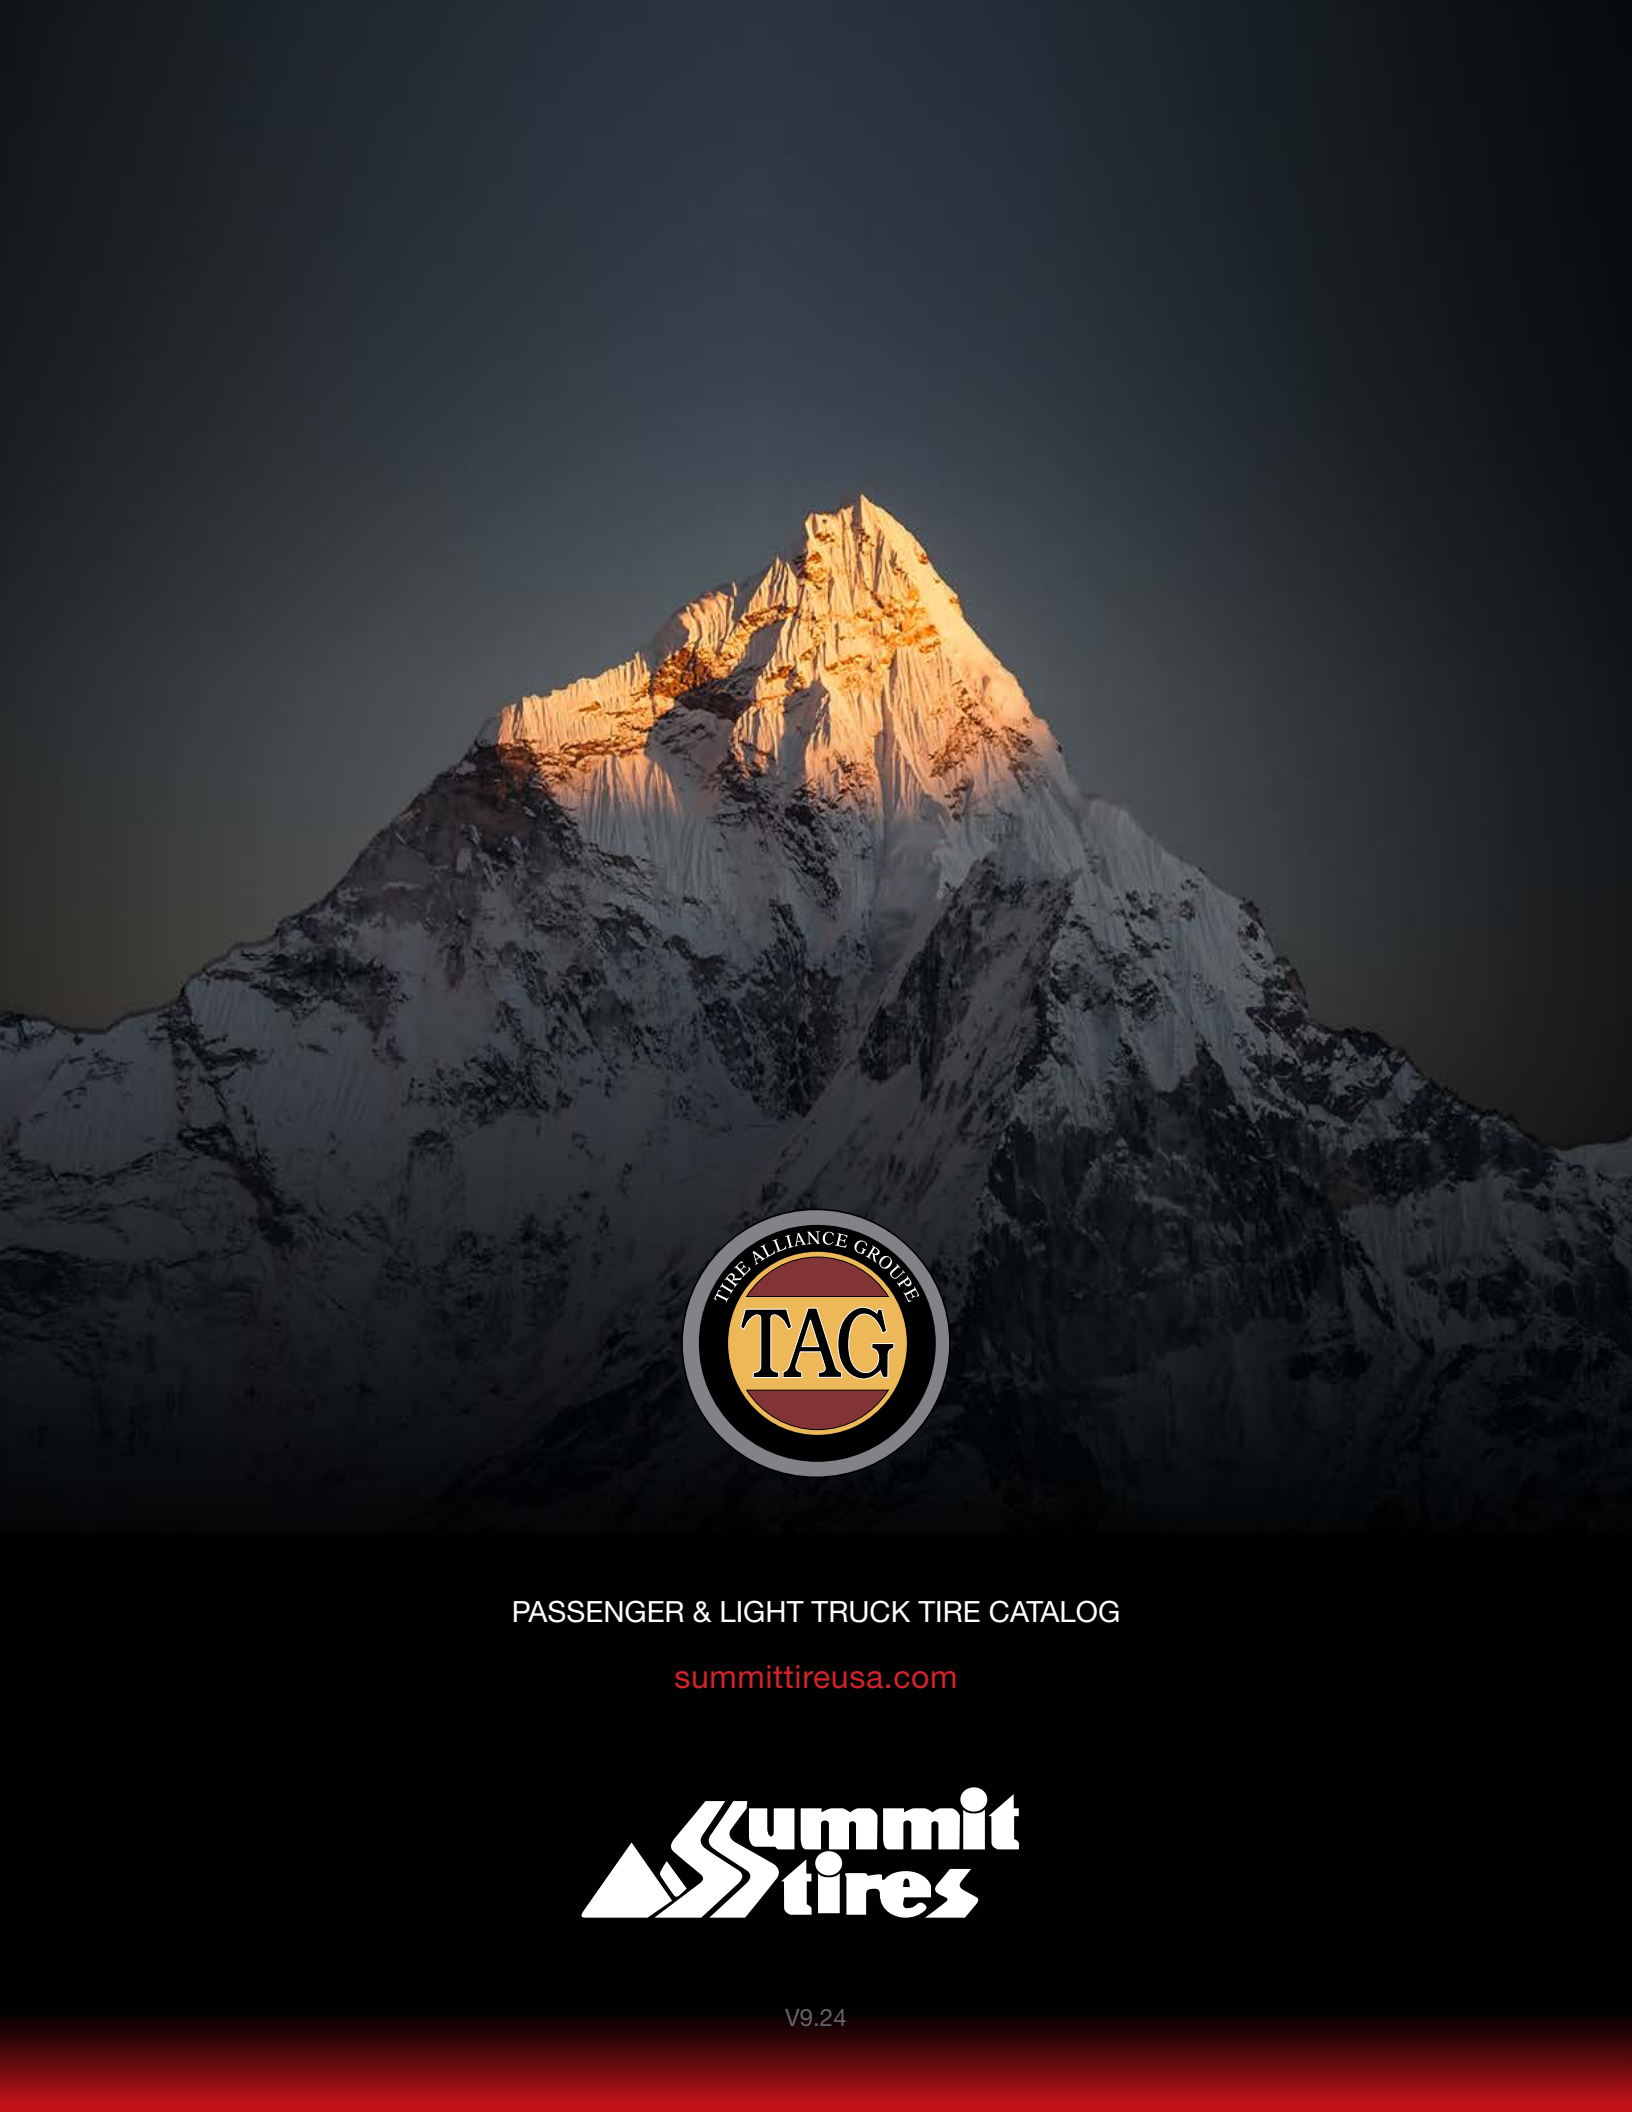

PASSENGER & LIGHT TRUCK TIRE CATALOG

summittireusa.com

