



 **Summit**
tires

PASSENGER & LIGHT TRUCK TIRES

summittireusa.com



TABLE OF CONTENTS

4	Ultramax A/S 2.0
5	Ultramax A/S
6	Ultramax HP A/S
7	Trail Climber SUV²
8	Trail Climber SUV
9	Trail Climber HT03
10	Trail Climber HT II
11	Trail Climber AT02
12	Trail Climber AT
13	Trail Climber RT
14	Hi Road ST








ULTRAMAX A/S 2.0

Size	PART#	LI/SR	L.R.	TD	OD	SW	RW	UTQG	MAX LOAD
					32/in.	in.	in.	in.	lbs@psi (1X)
175/65R14	20645	86T	XL	10	23	7	5	420 A A	1168@50
175/70R14	20640	84T		10	23.7	7	5	420 A A	1102@44
185/65R14	20629	86H		10	23.5	7.4	5.5	420 A A	1168@44
195/70R14	20637	91T		10	24.8	7.9	6	420 A A	1356@44
175/55R15	20660	77H		10	22.6	7.2	5.5	420 A A	908@44
175/65R15	20653	84H		10	24	7	5	420 A A	1102@44
185/55R15	20639	82V		10	23	7.6	6	420 A A	1047@44
185/60R15	20627	88H	XL	10	23.7	7.4	5.5	420 A A	1235@50
185/65R15	20621	92H	XL	10	24.4	7.4	5.5	420 A A	1389@50
195/60R15	20623	88H		10	24.2	7.9	6	420 A A	1235@44
195/65R15	20614	91H		10	25	7.9	6	420 A A	1356@44
205/60R15	20646	95H	XL	10	24.7	8.2	6	420 A A	1521@50
205/65R15	20624	94H		10	25.5	8.2	6	420 A A	1477@44
205/70R15	20635	96T		10	26.3	8.2	6	420 A A	1565@44
215/70R15	20628	98T		10	26.9	8.7	6.5	420 A A	1653@44
195/50R16	20654	84V		10	23.7	7.9	6	420 A A	1102@44
195/55R16	20652	87H		10	24.4	7.9	6	420 A A	1201@44
205/50R16	20648	87H		10	24.1	8.4	6.5	420 A A	1201@44
205/55R16	20611	91H		10	24.9	8.4	6.5	420 A A	1356@44
205/60R16	20620	92H		10	25.7	8.2	6	420 A A	1389@44
205/65R16	20619	95H		10	26.5	8.2	6	420 A A	1521@44
215/55R16	20622	97H	XL	10	25.3	8.9	7	420 A A	1609@50
215/60R16	20613	95H		10	26.1	8.7	6.5	420 A A	1521@44
215/65R16	20626	98T		10	27	8.7	6.5	420 A A	1653@44
225/60R16	20617	98H		10	26.6	9	6.5	420 A A	1653@44
225/65R16	20636	100H		10	27.5	9	6.5	420 A A	1764@44
235/60R16	20659	100V		10	27.1	9.4	7	420 A A	1764@44
235/65R16	20647	103T		10	28	9.4	7	420 A A	1929@44
205/50R17	20641	89V		10	25.1	8.4	6.5	420 A A	1728@44
215/45R17	20649	87W		10	24.6	8.4	7	420 A A	1201@44
215/50R17	20642	91V		10	25.5	8.9	7	420 A A	1356@44
215/55R17	20612	94V		10	26.3	8.9	7	420 A A	1477@44
215/60R17	20632	96T		10	27.2	8.7	6.5	420 A A	1565@44
215/65R17	20634	99T		10	28	8.7	6.5	420 A A	1709@44
225/45R17	20631	91V		10	25	8.9	7.5	420 A A	1356@44
225/50R17	20616	94V		10	25.9	9.2	7	420 A A	1477@44
225/55R17	20618	97V		10	26.8	9.2	7	420 A A	1609@44
225/60R17	20625	99H		10	27.6	9	6.5	420 A A	1709@44
225/65R17	10176	102T		10	28.5	9	6.5	420 A A	1874@44
235/45R17	20651	97W	XL	10	25.4	9.3	8	420 A A	1609@50
235/55R17	20644	99V		10	27.2	9.6	7.5	420 A A	1709@44
225/40R18	20658	92W	XL	10	25.1	9.1	8	420 A A	1389@50
225/50R18	20643	95H		10	26.9	9.2	7	420 A A	1521@44
235/45R18	20650	94V		10	26.3	9.3	8	420 A A	1477@44
235/50R18	20638	97V		10	27.3	9.6	7.5	420 A A	1609@44
235/55R18	20630	100V		10	28.1	9.6	7.5	420 A A	1764@44
235/60R18	20633	103H		10	29.1	9.4	7	420 A A	1929@44
245/40R18	20657	97W	XL	10	25.7	9.8	8.5	420 A A	1609@50
245/45R18	20656	100W	XL	10	26.7	9.6	8	420 A A	1764@50
235/55R19	20655	105V	XL	10	29.2	9.6	7.5	420 A A	2039@50

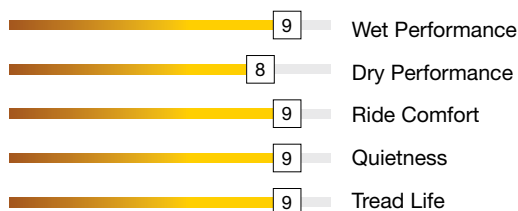

60,000 Mile Limited Treadwear Warranty

The ULTRAMAX A/S 2.0 is an exceptional all-season tire with the perfect balance of comfort and performance. Full-size offering with needed speed ratings from T to W for today's vehicles. Its design features four broad circumferential grooves, ensuring excellent wet traction. The wide footprint and notched center rib enhance stability and traction. ULTRAMAX A/S 2.0 guarantees both comfort and performance, coupled with a 60,000-mile tread life, ensuring peace of mind in all seasons.

TIRE FEATURES

- **BALANCED VARIABLE PITCH TREAD DESIGN:** Reduces road noise and assures a quiet comfortable cabin.
- **FULL-SIPED INNER TREAD BLOCKS:** Efficient water evacuation design promotes enhanced wet performance.
- **CENTER RIB WITH ANGLED SIPES:** Enhances traction while improving straight-line stability.






ULTRAMAX A/S

Size	PART#	LI/SR	L.R.	TD	OD	SW	RW	UTQG	MAX LOAD
					32/in.	in.	in.	in.	lbs@psi (1X)
175/70R13	10279	82T		10	22.68	6.97	5	420 A A	1047@44
175/65R14	10280	86T	XL	10	22.99	6.97	5	420 A A	1168@50
175/70R14	10278	84T		10	23.7	6.97	5	420 A A	1102@44
185/60R14	10276	82H		10	22.76	7.44	5.5	420 A A	1047@44
185/65R14	10274	86H		10	23.46	7.44	5.5	420 A A	1168@44
185/70R14	10272	88H		10	24.25	7.44	5.5	420 A A	1235@44
195/70R14	10268	91T		10	24.8	7.91	6	420 A A	1356@44
205/70R14	10260	98T	XL	10	25.35	8.23	6	420 A A	1653@50
185/55R15	10277	82V		10	23.03	7.64	6	420 A A	1047@44
185/60R15	10275	88H	XL	10	23.74	7.44	5.5	420 A A	1235@50
185/65R15	10273	92H	XL	10	24.45	7.44	5.5	420 A A	1389@50
195/55R15	10271	85V		10	23.43	7.91	6	420 A A	1135@44
195/60R15	10270	88H		10	24.21	7.91	6	420 A A	1235@44
195/65R15	10269	91H		10	25	7.91	6	420 A A	1356@44
205/60R15	10264	95H	XL	10	24.69	8.23	6	420 A A	1521@50
205/65R15	10262	94H		10	25.47	8.23	6	420 A A	1477@44
205/70R15	10259	96T		10	26.34	8.23	6	420 A A	1565@44
215/60R15	10255	94H		10	25.16	8.7	6.5	420 A A	1477@44
215/65R15	10252	96H		11	26.02	8.7	6.5	420 A A	1565@44
215/70R15	10249	98T		11	26.89	8.7	6.5	420 A A	1653@44
195/50R16	10412	84V		10	23.7	7.91	6	460 A B	1102@44
205/50R16	10267	87H		10	24.09	8.43	6.5	420 A A	1201@44
205/55R16	10265	94V	XL	10	24.88	8.43	6.5	420 A A	1477@50
205/60R16	10263	92H		10	25.67	8.23	6	420 A A	1389@44
205/65R16	10261	95H		10	26.46	8.23	6	420 A A	1521@44
215/55R16	10257	97H	XL	10	25.28	8.9	7	420 A A	1609@50
215/60R16	10254	95H		10	26.14	8.7	6.5	420 A A	1521@44
215/65R16	10251	98T		10	27.01	8.7	6.5	420 A A	1653@44
225/50R16	10248	92V		10	24.88	9.17	7	420 A A	1389@44
225/60R16	10245	98H		10	26.61	8.98	6.5	420 A A	1653@44
225/65R16	10243	100H		10	27.48	8.98	6.5	420 A A	1764@44
235/65R16	10413	103T		10	28.03	9.45	7	420 A A	1929@44
205/50R17	10266	89V		10	25.12	8.43	6.5	420 A A	1279@44
215/50R17	10258	91V		10	25.51	8.9	7	420 A A	1356@44
215/55R17	10256	94V		10	26.3	8.9	7	420 A A	1477@44
215/60R17	10253	96T		10	27.17	8.7	6.5	420 A A	1565@44
215/65R17	10250	99T		10	28.03	8.7	6.5	420 A A	1709@44
225/50R17	10247	94V		10	25.91	9.17	7	420 A A	1477@44
225/55R17	10246	97W		10	26.77	9.17	7	420 A A	1609@44
225/60R17	10244	99H		10	27.64	8.98	6.5	420 A A	1709@44
225/65R17	10420	102H		10	28.5	8.98	6.5	420 A A	1874@44
235/60R17	10241	102T		10	28.11	9.45	7	420 A A	1874@44
235/55R18	10242	100V		10	28.15	9.65	7.5	420 A A	1764@44
235/60R18	10240	103H		10	29.09	9.45	7	460 A B	1929@44

* Radial Trac II pattern

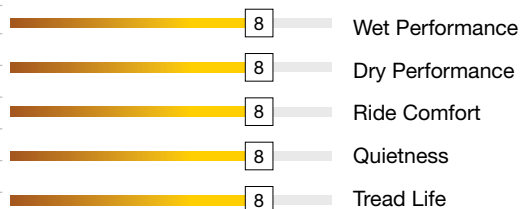

50,000 Mile Limited Treadwear Warranty

UTQG 420 A A AND 460 A B

The Ultramax AS tire is an all-season touring tire engineered to deliver exceptional handling and all-season performance. The Ultramax AS features 4 wide circumferential grooves to help channel water away quickly and efficiently delivering excellent wet weather traction. A modern non-directional tread design provides superior road feel and handling making the Ultramax AS the perfect everyday tire.

TIRE FEATURES

- Modern non-directional all-season tread design.
- Variable pitch tread design for low noise performance.
- Silica compound for superior wet traction and reduced rolling resistance.
- Jointless Bead Cover: spiral steel band wrapped around beads improves the structural rigidity of the tire resulting in a smooth ride.
- Higher sidewall turn-up provides improved sidewall strength and durability.



ULTRAMAX HP A/S


50,000 Mile Limited Treadwear Warranty

V AND W SPEED RATED , UTQG 480 AA A

The Ultramax HP AS is an ultra-high performance all-season tire engineered for high-speed performance, cornering, and braking. The aggressive tread pattern features 4 high angle grooves to channel water away from the tread face, maximizing traction on wet surfaces. Tapered tread edges provided improved stability, even tread wear, and a quiet comfortable ride. The Ultramax HP AS delivers the perfect balance between ultra-high performance and everyday comfort to give you confidence in all weather conditions.

TIRE FEATURES

- Solid center rib for improved high-speed stability, and reduced road noise.
- Silica compound for superior wet traction and reduced rolling resistance.
- High angle tread grooves enhance water evacuation and improve wet handling and hydroplane resistance.
- Taper tread edges promote even uniform contact pressure for increased stability, even wear and a quiet ride.
- 4 wide circumferential grooves enhance water drainage to maximize grip on wet surfaces.

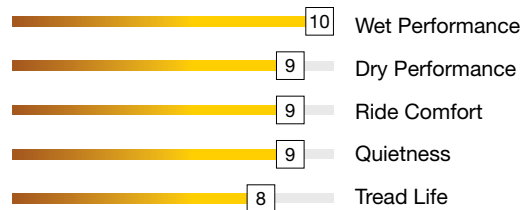


Size	PART#	LI/SR	L.R.	T.D.	O.D.	S.W.	R.W.	UTQG	MAX LOAD
					32nds	32nds	32nds	32nds	lbs@psi (1X)
225/55R16	10286	99W	XL	10	25.75	9.17	7	480 AA A	1709@50
205/45R17	10301	84W SL	XL	10	24.25	8.11	7	480 AA A	1102@44
215/45R17	10282	91W	XL	10	24.65	8.39	7	480 AA A	1356@50
225/45R17	10284	94W	XL	10	24.96	8.86	7.5	480 AA A	1477@50
235/45R17	10288	97W	XL	10	25.35	9.29	8	480 AA A	1609@50
235/55R17	10290	99W	SL	10	27.17	9.65	8.5	480 AA A	1709@44
245/40R17	10292	95W	XL	10	24.72	9.76	8.5	480 AA A	1521@50
245/45R17	10295	99W	XL	10	25.67	9.57	8	480 AA A	1709@50
215/35R18	10281	84W	XL	10	23.9	8.58	7.5	480 AA A	1102@50
225/40R18	10283	92W	XL	10	25.08	9.06	8	480 AA A	1389@50
225/45R18	10285	95W	XL	10	25.94	8.86	7.5	480 AA A	1521@50
235/40R18	10287	95W	XL	10	25.39	9.49	8.5	480 AA A	1521@50
235/45R18	5548380	98V	XL	10	26.34	9.29	8	480 AA A	1653@50
235/50R18	10289	101W	XL	10	27.28	9.65	7.5	480 AA A	1819@50
245/40R18	10293	97W	XL	10	25.71	9.76	8.5	480 AA A	1609@50
245/45R18	10296	100W	XL	10	26.65	9.57	8	480 AA A	1764@50
235/40R19	5548379	96V	XL	10	26.42	9.49	8.5	480 AA A	1565@50
245/40R19	10294	98W	XL	10	26.73	9.76	8.5	480 AA A	1653@50
245/45R19	10297	98W	XL	10	27.68	9.57	8	480 AA A	1653@44
245/35R20	10291	95W	XL	10	26.77	9.76	8.5	480 AA A	1521@50
245/45R20	10298	103W	XL	10	28.66	9.57	8	480 AA A	1929@50
255/35R20	10299	97W	XL	10	27.01	10.24	9	480 AA A	1609@50
275/40R20	10300	106W	XL	10	28.66	10.94	9.5	480 AA A	2094@50



TRAIL CLIMBER SUV²

Size	PART#	LI/SR	L.R.	T.D.	OD	SW	RW	UTQG	MAX LOAD	MAX LOAD
					32nds in.	in.	in.		lbs@psi (1X)	lbs@psi (2X)
215/65R16	20663	98H		10	27	8.7	6.5	700 A A	1653@44	
215/70R16	20690	100H		10	27.9	8.7	6.5	700 A A	1764@44	
235/60R16	20664	100H		10	27.1	9.4	7	700 A A	1764@44	
245/70R16	20665	107T		10	29.5	9.8	7	700 A A	2149@44	
255/70R16	20667	111H		10	30.1	10.2	7.5	700 A A	2403@44	
265/70R16	20666	112H		10	30.6	10.7	8	700 A A	2469@44	
215/60R17	20681	96H		10	27.2	8.7	6.5	700 A A	1565@44	
225/55R17	20662	97V		10	26.8	9.2	7	700 A A	1609@44	
225/60R17	20679	99H		10	27.6	9	6.5	700 A A	1709@44	
225/65R17	10454	102H		10	28.5	9	6.5	700 A A	1874@44	
235/55R17	20680	99V		10	27.2	9.6	7.5	700 A A	1709@44	
235/60R17	20684	102H		10	28.1	9.4	7	700 A A	1874@44	
235/65R17	20675	104H		10	29.1	9.4	7	700 A A	1984@44	
245/65R17	20685	107H		10	29.5	9.8	7	700 A A	2149@44	
255/60R17	20683	106H		10	29.1	10.2	7.5	700 A A	2094@44	
265/65R17	20682	112H		10	30.6	10.7	8	700 A A	2469@44	
215/55R18	20693	95H		10	27.3	8.9	7	700 A A	1521@44	
225/55R18	20686	98V		10	27.8	9.2	7	700 A A	1653@44	
225/60R18	20671	100H		10	28.6	9	6.5	700 A A	1764@44	
235/50R18	20677	97V		10	27.3	9.6	7.5	700 A A	1609@44	
235/55R18	20687	100V		10	28.1	9.6	7.5	700 A A	1764@44	2470@80
235/60R18	20670	107V	XL	10	29.1	9.4	7	700 A A	2149@50	2470@80
235/65R18	20688	106H		10	30	9.4	7	700 A A	2094@44	2778@80
245/60R18	20696	105H		10	29.6	9.8	7	700 A A	2039@44	2778@80
255/55R18	20672	109V	XL	10	29	10.4	8	700 A A	2271@50	3085@80
255/65R18	20698	111T		10	31.1	10.2	7.5	700 A A	2403@44	2835@80
265/60R18	20691	110H		10	30.5	10.7	8	700 A A	2337@44	2910@80
225/55R19	20702	99V		10	28.8	9.2	7	700 A A	1709@44	2910@80
235/45R19	20674	95V		10	27.4	9.3	8	700 A A	1521@44	3195@80
235/50R19	20692	103V	XL	10	28.3	9.6	7.5	700 A A	1929@50	2998@83
235/55R19	20689	105V	XL	10	29.2	9.6	7.5	700 A A	2039@50	3085@80
245/55R19	20697	103V		10	29.6	10	7.5	700 A A	1929@44	3305@80
255/50R19	20676	107V	XL	10	29.1	10.4	8	700 A A	2149@50	3415@80
255/55R19	20673	111V	XL	10	30	10.4	8	700 A A	2403@50	
255/60R19	20699	109H		10	31.1	10.2	7.5	700 A A	2271@44	
265/50R19	20695	110V	XL	10	29.5	10.9	8.5	700 A A	2337@50	
235/55R20	20705	105V	XL	10	30.2	9.6	7.5	700 A A	2039@50	
245/50R20	20706	102V		10	29.7	10	7.5	700 A A	1874@44	
245/60R20	20708	107H		10	31.6	9.8	7	700 A A	2149@44	
255/50R20	20668	109V	XL	10	30.1	10.4	8	700 A A	2271@50	
255/55R20	20700	110V	XL	10	31	10.4	8	700 A A	2337@50	
265/50R20	20669	107H		10	30.5	10.9	8.5	700 A A	2149@44	
275/40R20	20678	106W	XL	10	28.7	10.9	9.5	700 A A	2094@50	
265/40R21	20701	105W	XL	10	29.3	10.7	9.5	700 A A	2039@50	
275/40R21	20704	107W	XL	10	29.6	10.9	9.5	700 A A	2149@50	
275/45R21	20703	110W	XL	10	30.7	10.7	9	700 A A	2337@50	
285/40R21	20709	109W	XL	10	30	11.4	10	700 A A	2271@50	
295/35R21	20694	107W	XL	10	29.1	11.9	10.5	700 A A	2149@50	
315/40R21	20707	115W	XL	10	30.9	12.6	11	700 A A	2679@50	

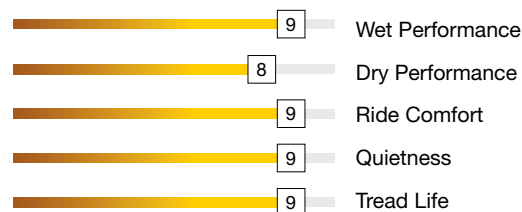

Loading up the SUV for an adventure or part of your daily routine the TRAIL CLIMBER SUV² can be trusted no matter where the road takes you. Modern tread design, with enhanced rubber compounds, reduces road noise while providing excellent handling and traction. Whether your drive has a purpose or just the thrill of the open road is calling, the TRAIL CLIMBER SUV² assures tranquil and secure travel on all routes.

TIRE FEATURES

- **RIDE COMFORT:** SPPS noise simulation technology optimizes tread lug arrangement minimizing road noise.
- **TRACTION:** Enhanced wet handling is aided by wide circumferential grooves working together with shoulder lateral grooves.
- **TREAD LIFE:** Wide footprint with optimized shoulder profile provides stable tread contact and promotes even wear.

60,000 Mile Limited Treadwear Warranty






TRAIL CLIMBER SUV

The Trail Climber SUV is engineered to deliver a combination of comfort and performance on SUVs and cross-over vehicles. A staggered tread block design provides a quiet, superior ride while full-depth sipes deliver exceptional all-weather traction throughout its long life. The Trail Climber SUV features a specially formulated compound for enhanced tread life.




TIRE FEATURES

- Block design provides noise cancellation, balances pressure and allows for more contact points on the road surface.
- Block edge design provides better wet traction and handling.
- Enhanced upper shoulder profile allows better surface contact
- Tie bars on shoulders for high speed stability.
- Jointless Bead Cover: spiral steel band wrapped around beads improves the structural rigidity of the tire resulting in a smooth ride.
- Rim Protector.

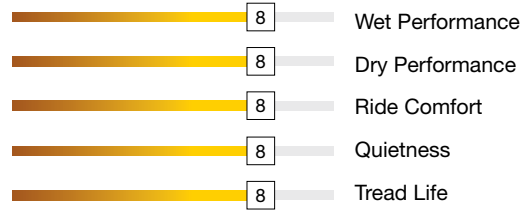

60,000 Mile Limited Treadwear Warranty
S, T, H AND V SPEED RATED, UTQG 700 A B

Size	PART#	LI/SR	L.R.	T.D.	OD	SW	RW	UTQG	MAX LOAD
				32nds	in.	in.	in.		lbs@psi (1X)
235/60R18	10401	107V	XL	11	29.09	9.45	7	700 A B	2149@50
235/65R18	10402	106T	SL	11	30.04	9.45	7	700 A B	2094@44
255/65R18	10403	111S	SL	11	31.06	10.24	7.5	700 A B	2403@44
225/55R19	10404	99V	SL	10	28.78	9.17	7	700 A B	1709@44
235/55R19	10405	101V	SL	10	29.17	9.65	7.5	700 A B	1819@44
245/55R19	10406	103H	SL	10	29.65	9.96	7.5	700 A B	1929@44
255/50R20	10407	105H	SL	10	30.08	10.43	8	700 A B	2039@44
265/50R20	10408	107V	SL	10	30.47	10.91	8.5	700 A B	2149@44

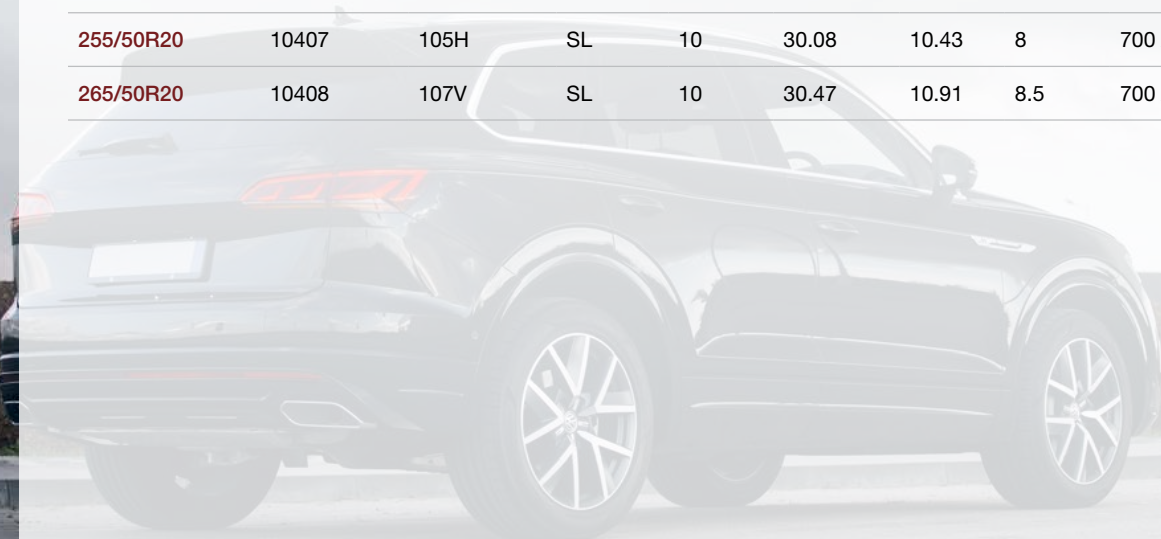



TRAIL CLIMBER HT03


The Trail Climber HT03 is Summit's premium HT (Highway) All-Season tire. Designed to provide outstanding handling and braking performance, packaged with a smooth drive for pickup trucks, large SUV's and 4X4's. Guaranteed to endure and go the distance, backed by Summit's trustworthy reputation and warranty.

TIRE FEATURES

- Enhanced Traction: Multiple 3D siping on the tread contact patch with 4 circumferential channels ensure water displacement and reliable traction in all road conditions.
- Trusted Durability: Reinforced tire casing construction promotes durable even tread wear and reliable load carrying capacity.
- Proven Comfort: Void angles and lateral groove tie bars are designed to create smooth airflow and increase handling stability.

50,000 Mile Limited Treadwear Warranty - LT sizes

60,000 Mile Limited Treadwear Warranty - P-metric sizes

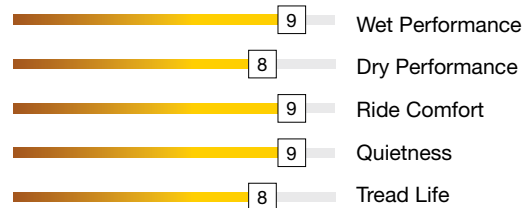

Size	PART#	LI/SR	L.R.	T.D.	OD	SW	RW	UTQG	MAX LOAD	MAX LOAD
				32nds	in.	in.	in.		lbs@psi (1X)	lbs@psi (2X)
235/75R15	20727	105T		11	28.86	9.3	6.0	700 A B	2039@44	
235/70R16	20726	106T		11	28.98	9.5	7.0	700 A B	2094@44	
245/70R16	20730	107T		11	29.53	9.8	7.0	700 A B	2149@44	
245/75R16	20732	111T		11	30.47	9.8	7.0	700 A B	2403@44	
255/70R16	20733	111T		11	30.08	10.2	7.5	700 A B	2403@44	
265/70R16	20739	112T		11	30.63	10.7	8.0	700 A B	2469@44	
265/75R16	20742	116T		11	31.65	10.5	7.5	700 A B	2756@44	
235/75R17	20728	109T		11	30.87	9.3	6.5	700 A B	2271@44	
245/65R17	20729	107T		11	29.53	9.8	7.0	700 A B	2149@44	
245/70R17	20731	110T		11	30.55	9.8	7.0	700 A B	2337@44	
265/65R17	20737	112S		11	30.55	10.7	8.0	700 A B	2469@44	
265/70R17	20740	115T		11	31.65	10.7	8.0	700 A B	2679@44	
255/70R18	20734	113T		11	32.09	10.2	7.5	700 A B	2535@44	
265/60R18	20736	110H		11	30.51	10.7	8.0	700 A A	2337@44	
265/65R18	20738	114T		11	31.54	10.7	8.0	700 A B	2601@44	
265/70R18	20741	116T		11	32.64	10.7	8.0	700 A B	2756@44	
275/65R18	20745	116T		11	32.09	11.0	8.0	700 A B	2756@44	
265/50R20	20735	107V		11	30.47	10.9	8.5	700 A A	2149@44	
275/55R20	20743	117T	XL	11	31.89	11.2	8.5	700 A A	2833@50	
275/60R20	20744	115T		11	32.99	11.0	8.0	700 A A	2679@44	
285/45R22	20746	114H	XL	11	32.09	11.2	9.5	700 A A	2601@50	
LT215/85R16	20747	115/112R	10PR	14	30.39	8.5	6.0		2680@80	2470@80
LT225/75R16	20748	115/112R	10PR	14	29.29	8.8	6.0		2680@80	2470@80
LT235/85R16	20750	120/116R	10PR	14	31.73	9.3	6.5		3042@80	2778@80
LT245/75R16	20752	120/116R	10PR	14	30.47	9.8	7.0		3042@80	2778@80
LT265/75R16	20756	123/120R	10PR	14	31.65	10.5	7.5		3415@80	3085@80
LT235/80R17	20749	120/117R	10PR	14	31.81	9.3	6.5		3085@80	2835@80
LT245/70R17	20751	119/116S	10PR	14	30.55	9.8	7.0		3000@80	2755@80
LT245/75R17	20753	121/118S	10PR	14	31.5	9.8	7.0		3195@80	2910@80
LT265/70R17	20754	123/120S	10PR	14	31.65	10.7	8.0		3415@80	3085@80
LT265/70R18	20755	124/121S	10PR	14	32.64	10.7	8.0		3525@80	3195@80
LT275/65R18	20757	123/120S	10PR	14	32.09	11.0	8.0		3415@80	3085@80
LT275/70R18	20759	125/122S	10PR	14	33.19	11.0	8.0		3640@80	3305@80
LT275/65R20	20758	126/123S	10PR	14	34.09	11.0	8.0		3750@80	3415@80
LMD - Last Mile Delivery										
195/75R16C	20723	107/105R	8PR	13	27.4	7.7	5		2150@69	2040@69
225/75R16C	20724	121/120R	10PR	13	29.2	8.7	6		3197@83	3086@83
235/65R16C	20725	121/119R	10PR	13	28	9.4	7		3197@83	2998@83

Treadwear warranty does not apply to LT/LMD tires.



TRAIL CLIMBER HT II

The Trail Climber HT II is engineered to deliver a comfort and performance on SUVs and cross-over vehicles. Tread design provides a quiet, superior ride while full-depth sipes deliver exceptional traction throughout its long life. The HT II features a specially formulated compound for enhanced tread life.


LMD now available. Based on proven HTII design, the C-type is engineered for commercial delivery and demanding regional applications.

TIRE FEATURES

- Tread design provides low road noise, by even distribution of contact points.
- Biting edges in shoulder lug design provide predictable wet traction and handling.
- Tie bars on shoulders for high speed stability.
- Rim Protector.

60,000 Mile Limited Treadwear Warranty

S, T AND R SPEED RATED, UTQG 500 A B

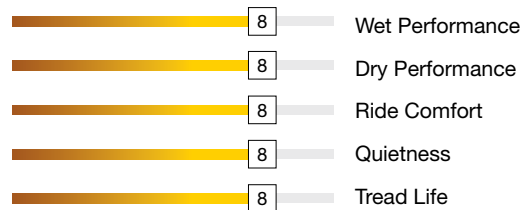

Size	PART#	LI/SR	L.R.	T.D.	OD	SW	RW	UTQG	MAX LOAD	MAX LOAD
				32nds	in.	in.	in.		lbs@psi (1X)	lbs@psi (2X)
235/75R15	10395	109T	XL	11	28.86	9.25	6.5	500 A B	2271@50	
215/70R16	10397	100T	SL	11	27.87	8.7	6.5	500 A B	1764@44	
225/70R16	10398	103T	SL	11	28.43	8.98	6.5	500 A B	1929@44	
235/70R16	345-312	105S	SL	11	28.98	9.45	7	500 A B	2094@44	
245/70R16	345-313	111T	XL	11	29.53	9.76	7	500 A B	2403@50	
245/75R16	10396	111T	SL	11	30.47	9.76	7	500 A B	2403@44	
255/70R16	345-314	100T	SL	11	30.08	10.24	7.5	500 A B	2403@44	
265/70R16	345-315	103S	SL	11	30.63	10.71	8	500 A B	2469@44	
265/75R16	345-320	104S	SL	11	31.65	10.51	7.5	500 A B	2756@44	
225/65R17	345-677	102H	SL	11	28.5	8.98	6.5	500 A B	1874@44	
235/65R17	10399	104T	SL	11	29.06	9.45	7	500 A B	1984@44	
245/65R17	345-534	107S	XL	11	29.53	9.76	7	500 A B	2403@50	
265/65R17	10400	112T	SL	11	30.55	10.71	8	500 A B	2469@44	
245/70R17	345-323	111T	SL	11	30.55	9.76	7	500 A B	2337@44	
265/70R17	345-325	111T	SL	11	31.65	10.71	8	500 A B	2679@44	
245/60R18	345-546	105H	SL	11	29.57	9.76	7	500 A B	2039@44	
255/65R18	345-825	116T	SL	11	31.06	10.24	7.5	500 A B	2403@44	
275/65R18	345-618	116T	SL	11	32.09	10.98	8	500 A B	2756@44	
275/55R20	345-520	117T	XL	11	31.89	11.18	8.5	500 A B	2833@50	
31X10.50R15	10394	109S	6 PR	14	30.51	10.55	8.5		2271@51	
LT215/85R16	10392	115/112S	10 PR	14	30.39	8.5	6		2680@80	2470@80
LT225/75R16	345-517	115/112R	10PR	14	29.29	8.78	6		2680@80	2470@80
LT235/85R16	345-528	120/116R	10PR	14	31.73	9.25	6.5		3042@80	2778@80
LT245/75R16	345-518	120/116R	10PR	14	30.47	9.76	7		3042@80	2778@80
LT265/75R16	345-719	123/120S	10PR	14	31.65	10.51	7.5		3415@80	3085@80
LT235/80R17	345-728	120/117R	10PR	14	31.81	9.25	6.5		3085@80	2835@80
LT245/75R17	345-755	121/118S	10PR	14	31.5	9.76	7		3195@80	2910@80
LT265/70R17	345-780	121/118S	10PR	14	31.65	10.71	8		3195@80	2910@80
LT265/70R18	10393	124/121S	10PR	14	32.64	10.71	8		3525@80	3195@80
LMD - Last Mile Delivery										
235/65R16C	10494	121/119R	10PR	13	28	9.4	7		3197@83	2998@83


* Treadwear Warranty Does not apply to LT designated tires



TRAIL CLIMBER AT02



Size	PART#	LI/SR	L.R.	T.D.	OD	SW	RW	UTQG	MAX LOAD	MAX LOAD
				32nds	in.	in.	in.		lbs@psi (1X)	lbs@psi (2X)
235/75R15	20898	109S	XL	13	28.86	9.25	6	620 A B	2271@50	
235/70R16	20899	106S		13	28.98	9.45	7	620 A B	2094@44	
245/75R16	20900	111S		13	30.47	9.76	7	620 A B	2403@44	
265/70R16	20901	112T		13	30.63	10.71	8	620 A B	2469@44	
265/75R16	20902	116S		13	31.65	10.51	8	620 A B	2756@44	
235/65R17	20903	104S		13	29.06	9.45	7	620 A B	1984@44	
245/65R17	20904	107S		13	29.53	9.76	7	620 A B	2149@44	
245/70R17	20905	110T		13	30.55	9.76	7	620 A B	2337@44	
255/65R17	20906	110T		13	30.08	10.24	8	620 A B	2337@44	
265/65R17	20907	112S		13	30.55	10.71	8	620 A B	2469@44	
265/70R17	20908	115S		13	31.65	10.71	8	620 A B	2679@44	
265/65R18	20909	114T		13	31.54	10.71	8	620 A B	2601@44	
265/70R18	20910	116T		13	32.64	10.71	8	620 A B	2756@44	
275/65R18	20911	116T		13	32.09	10.98	8	620 A B	2756@44	
275/55R20	20897	117T	XL	13	31.89	11.18	9	620 A B	2833@50	
265/50R20	20912	111T	XL	13	30.47	10.91	9	620 A B	2403@50	
275/60R20	20913	115T		13	32.99	10.98	8	620 A B	2679@44	
285/45R22	20914	114H	XL	13	32.09	11.22	10	620 A B	2601@50	
LT225/75R16	20921	115/112S	10PR	16	29.29	8.78	6		2680@80	2470@80
LT235/85R16	20922	120/116S	10PR	16	31.73	9.25	7		3042@80	2778@80
LT245/75R16	20923	120/116S	10PR	16	30.47	9.76	7		3042@80	2778@80
LT265/75R16	20924	123/120S	10PR	16	31.65	10.51	8		3415@80	3085@80
LT235/80R17	20925	120/117R	10PR	16	31.81	9.25	7		3085@80	2835@80
LT245/70R17	20926	119/116S	10PR	16	30.55	9.76	7		3000@80	2755@80
LT245/75R17	20927	121/118S	10PR	16	31.5	9.76	7		3195@80	2910@80
LT265/70R17	20928	123/120S	10PR	16	31.65	10.71	8		3415@80	3085@80
LT285/70R17	20929	126/123S	10PR	16	32.76	11.5	9		3750@80	3415@80
LT315/70R17	TBD	126/123S	10PR	16	34.41	12.72	10		3750@65	3415@65
LT265/70R18	20931	124/121S	10PR	16	32.64	10.71	8		3525@80	3195@80
LT275/65R18	20932	123/120R	10PR	16	32.09	10.98	8		3415@80	3085@80
LT275/70R18	20933	125/122R	10PR	16	33.19	10.98	8		3640@80	3305@80
LT265/60R20	20934	121/118R	10PR	16	32.52	10.71	8		3195@80	2910@80
LT275/55R20	20935	120/117R	10PR	16	31.89	11.18	9		3085@80	2835@80
LT275/60R20	20936	123/120R	10PR	16	32.99	10.98	8		3415@80	3085@80
LT275/65R20	20937	126/123R	10PR	16	34.09	10.98	8		3750@80	3415@80
LT285/60R20	20938	125/122R	10PR	16	33.46	11.5	9		3640@80	3305@80
LT305/55R20	20939	121/118R	10PR	16	33.23	12.44	10		3195@65	2910@65
31X10.50R15	20915	109S	6PR	16	30.51	10.55	9		2270@50	
35X12.50R17	TBD	125R	10PR	16	34.53	12.52	10		3640@65	
33X12.50R18	20917	118S	10PR	16	32.52	12.52	10		2910@65	
35X12.50R18	20918	123R	10PR	16	34.53	12.52	10		3415@65	
33X12.50R20	20919	114S	10PR	16	32.52	12.52	10		2600@65	
35X12.50R20	20920	121R	10PR	16	34.53	12.52	10		3195@65	

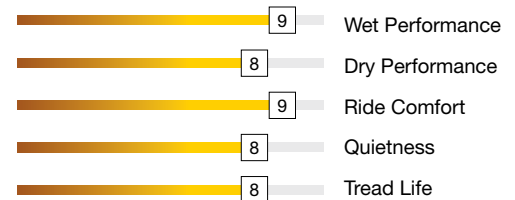

The Summit Trail Climber AT02 is your trusted all terrain tire for trucks and SUVs. The AT02 is just as at home on the trails as it is navigating the daily roads and highways. Reliable in all seasons, with deep tread and proudly wearing the 3PMS certification badge. Enjoy the Trail Climber AT02, as it ensures a smooth and quiet ride every time.

TIRE FEATURES

- Wide tread footprint, supported by reinforced shoulders, ensure even pressure distribution sustaining even wear for extended tread life.
- Functional scalloped shoulders with deep tread depths and enhanced sidewall biters guarantees ample traction when required
- Four circumferential grooves with lateral shoulder channels expedite water evacuation.

50,000 Mile Limited Treadwear Warranty
R, S AND T SPEED RATED UTQG 620 A B






TRAIL CLIMBER AT

The Trail Climber AT is at home on road and off road. With an aggressive tread pattern and rugged sidewall the Trail Climber AT delivers exceptional traction on all road conditions. Along with strength and durability it still delivers a smooth and quiet ride for cruising.

TIRE FEATURES

- Modern aggressive AT design.
- Circumferential wide tread grooves deliver exceptional wet grip and handling.
- Tiered tread grooves improve water evacuation and reduces stone retention.
- High tensile strength bead wire, jointless bead cover and wrapped bead wire improves the structural rigidity of the tire resulting in a stable, smooth ride.
- Rim protector

40,000 Mile Limited Treadwear Warranty
R, S AND T SPEED RATED, UTQG 500 A B

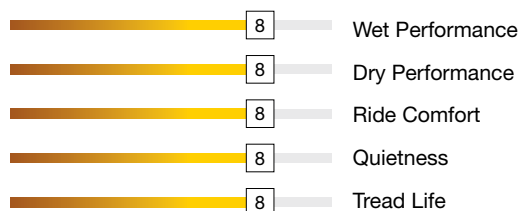

Size	PART#	LI/SR	L.R.	T.D.	OD	SW	RW	UTQG	MAX LOAD	MAX LOAD
				32nds	in.	in.	in.		lbs@psi (1X)	lbs@psi (2X)
265/75R16	261-320	116S	SL	13	31.65	10.51	7.5	500 A B	2756@44	
265/70R17	261-325	115T	SL	13	31.65	10.71	8	500 A B	2679@44	
275/65R18	261-618	116T	SL	13	32.09	10.98	8	500 A B	2756@44	
275/55R20	261-520	117H	XL	13	31.89	11.18	8.5	500 A B	2833@50	
31X10.50R15LT	261-924	109S	6PR	16	30.51	10.55	8.5		2270@50	
LT225/75R16	261-517	115/112S	10PR	16	29.29	8.78	6		2680@80	2470@80
LT235/85R16	261-528	120/116S	10PR	16	31.73	9.25	6.5		3042@80	2778@80
LT245/75R16	261-518	120/116S	10PR	16	30.47	9.76	7		3042@80	2778@80
LT265/75R16	261-719	123/120S	10PR	16	31.65	10.51	7.5		3415@80	3085@80
LT285/75R16	261-720	126/123S	10PR	16	32.83	11.26	8		3750@80	3415@80
LT235/80R17	261-728	120/117R	10PR	16	31.81	9.25	6.5		3085@80	2835@80
LT245/75R17	261-755	120/118S	10PR	16	31.5	9.76	7		3195@80	2910@80
LT265/70R17	261-780	121/118S	10PR	16	31.65	10.71	8		3195@80	2910@80
LT285/70R17	261-793	121/118S	10PR	16	32.76	11.5	8.5		3195@65	2910@65
LT265/70R18	261-762	124/121R	10PR	16	32.64	10.71	8		3525@80	3195@80
LT275/65R18	261-824	123/120S	10PR	16	32.09	10.98	8		3415@80	3085@80
LT275/70R18	261-822	125/122R	10PR	16	33.19	10.98	8		3640@80	3305@80
LT265/60R20	261-845	121/118R	10PR	16	32.52	10.71	8		3195@80	2910@80
LT275/65R20	261-828	126/123S	10PR	16	34.09	10.98	8		3750@80	3415@80

40,000 Mile Limited Treadwear Warranty




TRAIL CLIMBER RT

The SUMMIT TRAIL CLIMBER RT provides reliable versatility while ensuring steadfast traction and stability across multiple terrains. From rugged trails to urban streets, the deep tread lugs and aggressive sidewall biters guarantee confidence and performance wherever the road leads.

TIRE FEATURES

- Deep stepped lug treads with scalloped shoulders and aggressive sidewall biters guarantee traction & protection from the elements when needed most.
- Engineered with proprietary rubber compound for on/off road use delivers unparalleled durability.
- 3PMS certified provides confident traction when the temperature drops.

45,000 Mile Limited Treadwear Warranty
S, T AND Q SPEED RATED, UTQG 600 A B

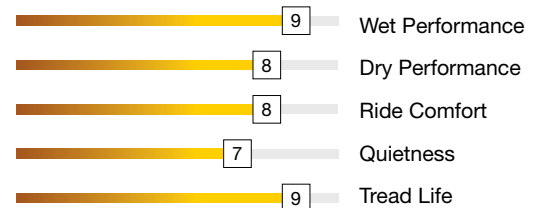

Size	PART#	LI/SR	L.R.	T.D.	OD	SW	RW	UTQG	MAX LOAD	MAX LOAD
				32nds	in.	in.	in.		lbs@psi (1X)	lbs@psi (2X)
265/70R17	1600698	115T		16	15.0	10.7	7.0	600 A B	2679@44	
255/70R18	1600694	116T	XL	16	15.0	10.2	6.0	600 A B	2756@50	
265/60R18	1600696	114S	XL	16	14.0	10.7	7.0	600 A B	2601@50	
265/65R18	1600697	116T	XL	16	15.0	10.7	7.0	600 A B	2756@50	
265/70R18	1600699	116S		16	15.0	10.7	7.0	600 A B	2756@44	
275/65R18	1600702	116T	XL	16	15.0	10.9	7.0	600 A B	2756@50	
265/50R20	1600695	111T	XL	16	15.0	10.9	7.0	600 A B	2403@50	
275/55R20	1600700	117T	XL	16	15.0	11.1	7.0	600 A B	2833@50	
275/60R20	1600701	116T	XL	16	16.0	10.9	7.0	600 A B	2756@50	
285/45R22	1600703	114Q	XL	16	15.0	11.2	9.0	600 A B	2601@50	
LT245/70R17	1600704	119/116Q	10PR	18	14.0	9.7	6.0		3000@80	2755@80
LT245/75R17	1600705	121/118Q	10PR	18	15.0	9.7	6.0		3195@80	2910@80
LT265/70R17	1600707	123/120Q	10PR	18	15.0	10.7	7.0		3415@80	3085@80
LT285/70R17	1600714	126/123Q	10PR	18	15.0	11.5	7.0		3750@80	3415@80
LT265/65R18	1600706	122/119Q	10PR	18	15.0	10.7	7.0		3305@80	3000@80
LT265/70R18	1600708	124/121Q	10PR	18	15.0	10.7	7.0		3525@80	3195@80
LT275/65R18	1600711	123/120Q	10PR	18	15.0	10.9	7.0		3415@80	3085@80
LT275/70R18	1600713	125/122Q	10PR	18	15.0	10.9	7.0		3640@80	3305@80
LT275/55R20	1600709	120/117Q	10PR	18	15.0	11.1	7.0		3085@80	2835@80
LT275/60R20	1600710	123/120Q	10PR	18	16.0	10.9	7.0		3415@80	3085@80
LT275/65R20	1600712	126/123Q	10PR	18	16.0	10.9	7.0		3750@80	3415@80
LT305/55R20	1600715	125/122Q	12PR	18	16.0	12.4	8.0		3640@80	3305@80
33X12.50R17LT	1600716	120Q	10PR	18	15.0	12.5	8.0		3085@65	
35X12.50R17LT	1600720	125Q	10PR	18	16.0	12.5	8.0		3640@65	
37X12.50R17LT	1600725	124Q	8PR	18	17.0	12.5	8.0		3525@50	
33X12.50R18LT	1600717	122Q	12PR	18	15.0	12.5	8.0		3305@80	
35X12.50R18LT	1600721	128Q	12PR	18	16.0	12.5	8.0		3970@80	
37X12.50R18LT	1600726	128Q	10PR	18	17.0	12.5	8.0		3970@65	
33X12.50R20LT	1600718	119Q	12PR	18	15.0	12.5	8.0		3000@80	
35X12.50R20LT	1600722	125Q	12PR	18	16.0	12.5	8.0		3640@80	
35X13.50R20LT	1600724	126Q	12PR	18	16.0	13.5	9.0		3750@80	
37X12.50R20LT	1600727	126Q	10PR	18	17.0	12.5	8.0		3750@65	
33X12.50R22LT	1600719	114Q	12PR	18	16.0	12.5	8.0		2600@80	
35X12.50R22LT	1600723	121Q	12PR	18	16.0	12.5	8.0		3195@80	
37X12.50R22LT	1600728	127Q	12PR	18	17.0	12.5	8.0		3860@80	
37X13.50R22LT	1600729	128Q	12PR	18	17.0	13.5	9.0		3970@80	



HI ROAD ST

The Hi Road ST is an ST tire designed for towed trailer applications. With its radial construction, the Hi Road ST is engineered to deliver long life and superior towing stability.

TIRE FEATURES

- Radial construction provides strength and durability
- Tread is designed to reduce excessive heat build up
- Tread pattern delivers a stable and quiet ride
- Rubber compound engineered to provide low rolling resistance
- Nylon overlay on 15" and 16" sizes.



Tire size	PART#	LI/SR	LI/SR	PLY	T.D. 32nds	O.D. in.	S.W. in.	R.W. in.	LCC (1x) lbs@psi	LCC (2x) lbs@psi
ST175/80R13	ST1-922	ST1-922	91/87L	6	10	24.0	7.0	5.00	1355@50	1200@50
ST185/80R13	ST1-923	ST1-923	94/89L	6	10	24.6	7.2	5.00	1475@50	1280@50
ST205/75R14	ST1-930	ST1-930	100/96L	6	10	26.1	8.0	5.50	1760@50	1565@50
ST215/75R14	ST1-932	ST1-932	102/98L	6	10	26.7	8.5	6.00	1870@50	1650@50
ST205/75R15	ST1-943	ST1-943	107/102L	8	10	27.1	8.0	5.50	2150@65	1870@65
ST225/75R15	ST1-947	ST1-947	117/112L	10	10	28.3	8.8	6.00	2830@80	2470@80
ST235/80R16	ST1-961	ST1-961	124/120L	10	10	30.7	9.2	6.50	3520@80	3080@80
ST235/85R16	ST1-970	ST1-970	125/121L	10	10	31.7	9.2	6.50	3640@80	3200@80

















USA LIMITED WARRANTY

PASSENGER & LIGHT TRUCK TIRES

This Limited Warranty / Adjustment Policy provides for tire replacement under specified conditions. This policy applies to SUMMIT tires used in normal highway service (commercial applications excluded) displaying warrantable conditions. Tires that become unserviceable or wear out because of neglect or mistreatment are excluded from SUMMIT warranty coverage.

THIS IS THE ONLY EXPRESSED WARRANTY MADE BY SAILUN TIRE AMERICAS NO EMPLOYEE, RETAILER, DEALER, OR REPRESENTATIVE HAS THE AUTHORITY TO MAKE ANY WARRANTY, REPRESENTATION, PROMISE OR AGREEMENT THAT IN ANY WAY VARIES THE TERMS OR CONDITIONS SET FORTH IN THIS LIMITED WARRANTY.

WARRANTY ELIGIBILITY

This warranty applies to every SUMMIT replacement passenger car or light truck tire bearing the SUMMIT brand name and complete Department of Transportation serial identification number while operated in normal highway use (commercial applications excluded) in the USA. These tires are covered by this warranty for the life of the original usable tread depth (the original tread depth down to the level of tread wear indicators molded at 2/32 inch) within 60 months from the date of purchase (proof of purchases required), or if proof of purchase is not available, the coverage will be 60 months from the date of manufacture. This warranty applies only to the original tire purchaser, and is not transferrable to any other party. This time period does not represent the expected service life for tires covered by this warranty.

WHAT IS NOT WARRANTED

Tires that have become unserviceable for the following reasons:

- Improper repairs or repairs that have failed. Improper repairs will void this Limited Warranty.
- Improper maintenance which can include: improper inflation or other maintenance abuses.
- Improper application or operations such as speeding, improper tire size and / or specification.
- Improper mounting / dismounting procedures, tire/wheel assembly imbalance.


- Mechanical irregularities in the vehicle or wheel, such as bent wheel assemblies, misalignment, worn or faulty components.
- Weather checking/cracking or failures after four years (60 months) from the date of manufacture.
- Accident, corrosion, vandalism, fire or damages caused by contamination by petroleum or other chemical products.
- Tires used in commercial applications such as taxis, shuttle vehicles and couriers.
- Irregular tread wear, or worn-out (beyond 2/32nds remaining tread depth) is not covered under the SUMMIT Limited Warranty
- Road hazard injuries or damages caused by obstacles or debris, such as cuts, punctures (whether repairable or not), snags, bruises, tears, abrasions or impact breaks (whether repairable or not), etc.

ADDITIONAL EXCLUSIONS

- Materials added such as fillers, sealants, balancing substances and external tire treatments. If the added material is the cause of a failure the warranty will be deemed as void.
 - Tires submitted for ride disturbance complaints after 25% (2/32") tread wear.
 - Tires on vehicles registered or operated outside of the USA.
 - Tires not purchased in the USA through the Sailun Tire Americas distribution channel.
 - Tires purchased as used.
 - Tires branded by SUMMIT to note special classification at time of purchase, such as "NA" (non-adjustable), or tires altered by notching or buffing.
 - Tires used on vehicles in racing or special applications.
 - Tires rendered unserviceable due to snow chains or studs.
 - Flat spotting due to improper storage or caused by brake lock.
 - SUMMIT products produced prior to January 1, 2013.
- * Note: Consequential damage mentioned above may not apply to you based on individual State limitations.

WHAT IS WARRANTED

Tires that have become unserviceable for reasons other than stated above, within 48 months of the date of manufacturer or 60 months from the date of purchase (proof of purchase required) during its useable tread life, the tires will be replaced in accordance with this warranty.

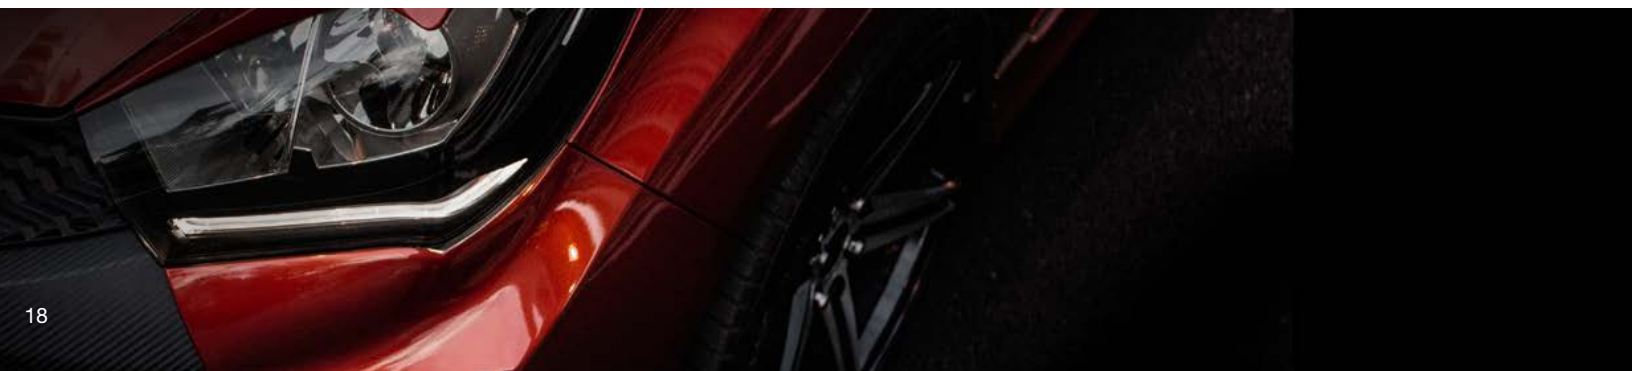



MODEL DEFECTS LIMITED MILEAGE WARRANTY

Model	Defects/ Materials	# Months	Tread Life Protection	Miles/ Months
SUMMIT ULTRAMAX A/S 2.0	YES	60	YES	60K/60
ULTRAMAX A/S	YES	60	YES	50K/60
ULTRAMAX HP A/S	YES	60	YES	50K/60
SUMMIT TRAIL CLIMBER SUV ²	YES	60	YES	60K/60
TRAIL CLIMBER SUV	YES	60	YES	60K/60
TRAIL CLIMBER HT03- LT SIZES	YES	60	YES	50K/60
TRAIL CLIMBER HT03- P-METRIC SIZES	YES	60	YES	60K/60
TRAIL CLIMBER HT II	YES	60	YES	60K/60
TRAIL CLIMBER AT02	YES	60	YES	50K/60
TRAIL CLIMBER AT	YES	60	YES	40K/60
TRAIL CLIMBER RT	YES	60	YES	45K/60
HI ROAD ST	YES	60	NO	-

Note: All tire models, staggered fitment vehicles have half mileage for rear tires if different size than the front tires

Select SUMMIT tires are assigned a Limited Mileage Warranty that protects the consumer against premature tread wear. If a tire reaches the end of its “usable tread life” before the stat ed mileage protection, the consumer will be issued a replacement SUMMIT tire on a prorated basis, which means the consumer will be responsible for a percentage of the replacement cost. In order to maintain limited mileage protection, all tires must be properly inflated, balanced, rotated and aligned as recommended by vehicle manufacturer. All claims must be accompanied by the original purchase invoice as well as invoices for all on time services provided. Under all circumstances, the cost of mounting, balancing and any other service charges including applicable taxes, disposal fees are required to be paid by the consumer.

APPROVED TIRE ROTATION INTERVALS AND PATTERNS

The purpose of regularly rotating tires is to prolong their useful life by achieving more uniform wear for all tires on a vehicle. Before rotating tires, always consult the owner’s manual for rotation recommendations for specific vehicles. If no rotation period is

specified, tires should be rotated, at minimum, every 6,000 miles or at any sign of uneven wear. The first rotation is the most important. Rotating the tires as recommended by the vehicle or tire manufacturer will help even out the amount of wear on each tire and extend the life of the entire set. Such tires include: “Temporary Use Spares”, unidirectional tires and tires with asymmetric tread designs. Also, some vehicles may have different sized tires mounted on the front and rear axles, and these different sized tires have rotation restrictions. Check the owner’s manual for the proper rotation recommendations for these special cases. When tires are rotated, the inflation pressures must be adjusted for the tires’ new positions in accordance with the actual loads on that wheel position and the vehicle manufacturer’s recommendations. Underinflated or overinflated tires may result in poor handling, uneven tread wear, and increased fuel consumption. If the tires show uneven wear, ask the service person to check for and correct any misalignment, imbalance, or other mechanical problem before rotation.

ADJUSTMENT POLICY

Passenger and Light Truck Tires When the original usable tread is worn 25% (2/32”) or less, and a warrantable condition is found, the tire will be replaced with a comparable new SUMMIT tire free of charge. Replacement tires will be mounted and balanced at the vehicle owner’s expense. Other service charges such as tire rotation, alignment or applicable taxes are payable by the customer. When a tire has worn past the above specified period for free replacement and a warrantable condition is found, the customer must pay for the cost of a new comparable SUMMIT passenger or light truck tire on a prorated basis. The dealer shall determine this cost by multiplying the percentage of usable tread worn by the current retail selling price (Suggested Retail Price x 80%) of that tire at the time of warranty replacement. The cost of mounting, balancing and any other service charges or applicable taxes are payable by the customer.

MANDATORY TIRE REGISTRATION

For tires purchased in the USA, please register your tires at: www.summittiresusa.com

Rev 2.24U

**ALL SUMMIT TIRE WARRANTIES MUST BE SUBMITTED
THROUGH THE POINT OF PURCHASE.**





PASSENGER & LIGHT TRUCK TIRE CATALOG

summittireusa.com

