




# ULTRAMAX A/S



Size	PART#	LI/SR	L.R.	TD	OD	SW	RW	UTQG	MAX LOAD
					32/in. in.	in.	in.		lbs@psi (1X)
175/70R13	10279	82T		10	22.68	6.97	5	420 A A	1047@44
175/65R14	10280	86T	XL	10	22.99	6.97	5	420 A A	1168@50
175/70R14	10278	84T		10	23.7	6.97	5	420 A A	1102@44
185/60R14	10276	82H		10	22.76	7.44	5.5	420 A A	1047@44
185/65R14	10274	86H		10	23.46	7.44	5.5	420 A A	1168@44
185/70R14	10272	88H		10	24.25	7.44	5.5	420 A A	1235@44
195/70R14	10268	91T		10	24.8	7.91	6	420 A A	1356@44
205/70R14	10260	98T	XL	10	25.35	8.23	6	420 A A	1653@50
185/55R15	10277	82V		10	23.03	7.64	6	420 A A	1047@44
185/60R15	10275	88H	XL	10	23.74	7.44	5.5	420 A A	1235@50
185/65R15	10273	92H	XL	10	24.45	7.44	5.5	420 A A	1389@50
195/55R15	10271	85V		10	23.43	7.91	6	420 A A	1135@44
195/60R15	10270	88H		10	24.21	7.91	6	420 A A	1235@44
195/65R15	10269	91H		10	25	7.91	6	420 A A	1356@44
205/60R15	10264	95H	XL	10	24.69	8.23	6	420 A A	1521@50
205/65R15	10262	94H		10	25.47	8.23	6	420 A A	1477@44
205/70R15	10259	96T		10	26.34	8.23	6	420 A A	1565@44
215/60R15	10255	94H		10	25.16	8.7	6.5	420 A A	1477@44
215/65R15	10252	96H		11	26.02	8.7	6.5	420 A A	1565@44
215/70R15	10249	98T		11	26.89	8.7	6.5	420 A A	1653@44
195/50R16	10412	84V		10	23.7	7.91	6	460 A B	1102@44
205/50R16	10267	87H		10	24.09	8.43	6.5	420 A A	1201@44
205/55R16	10265	94V	XL	10	24.88	8.43	6.5	420 A A	1477@50
205/60R16	10263	92H		10	25.67	8.23	6	420 A A	1389@44
205/65R16	10261	95H		10	26.46	8.23	6	420 A A	1521@44
215/55R16	10257	97H	XL	10	25.28	8.9	7	420 A A	1609@50
215/60R16	10254	95H		10	26.14	8.7	6.5	420 A A	1521@44
215/65R16	10251	98T		10	27.01	8.7	6.5	420 A A	1653@44
225/50R16	10248	92V		10	24.88	9.17	7	420 A A	1389@44
225/60R16	10245	98H		10	26.61	8.98	6.5	420 A A	1653@44
225/65R16	10243	100H		10	27.48	8.98	6.5	420 A A	1764@44
235/65R16	10413	103T		10	28.03	9.45	7	420 A A	1929@44
205/50R17	10266	89V		10	25.12	8.43	6.5	420 A A	1279@44
215/50R17	10258	91V		10	25.51	8.9	7	420 A A	1356@44
215/55R17	10256	94V		10	26.3	8.9	7	420 A A	1477@44
215/60R17	10253	96T		10	27.17	8.7	6.5	420 A A	1565@44
215/65R17	10250	99T		10	28.03	8.7	6.5	420 A A	1709@44
225/50R17	10247	94V		10	25.91	9.17	7	420 A A	1477@44
225/55R17	10246	97W		10	26.77	9.17	7	420 A A	1609@44
225/60R17	10244	99H		10	27.64	8.98	6.5	420 A A	1709@44
225/65R17	10420	102H		10	28.5	8.98	6.5	420 A A	1874@44
235/60R17	10241	102T		10	28.11	9.45	7	420 A A	1874@44
235/55R18	10242	100V		10	28.15	9.65	7.5	420 A A	1764@44
235/60R18	10240	103H		10	29.09	9.45	7	460 A B	1929@44

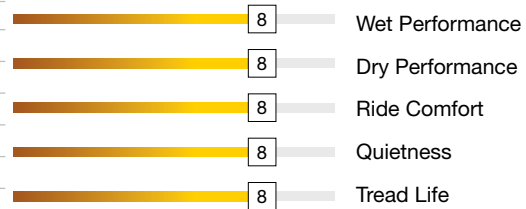

**50,000 Mile Limited Treadwear Warranty**  
**UTQG 420 A A AND 460 A B**

The Ultramax AS tire is an all-season touring tire engineered to deliver exceptional handling and all-season performance. The Ultramax AS features 4 wide circumferential grooves to help channel water away quickly and efficiently delivering excellent wet weather traction. A modern non-directional tread design provides superior road feel and handling making the Ultramax AS the perfect everyday tire.

### TIRE FEATURES

- Modern non-directional all-season tread design.
- Variable pitch tread design for low noise performance.
- Silica compound for superior wet traction and reduced rolling resistance.
- Jointless Bead Cover: spiral steel band wrapped around beads improves the structural rigidity of the tire resulting in a smooth ride.
- Higher sidewall turn-up provides improved sidewall strength and durability.

\* Radial Trac II pattern