




ULTRAMAX A/S 2.0



Size	LI/SR	TD	OD	SW	RW	UTQG	MAX LOAD
		32/in.	in.	in.	in.		lbs@psi (1X)
175/65R14	86T XL	10	23	7	5	420 A A	1168@50
175/70R14	84T	10	23.7	7	5	420 A A	1102@44
185/65R14	86H	10	23.5	7.4	5.5	420 A A	1168@44
195/70R14	91T	10	24.8	7.9	6	420 A A	1356@44
175/55R15	77H	10	22.6	7.2	5.5	420 A A	908@44
175/65R15	84H	10	24	7	5	420 A A	1102@44
185/55R15	82V	10	23	7.6	6	420 A A	1047@44
185/60R15	88H XL	10	23.7	7.4	5.5	420 A A	1235@50
185/65R15	92H XL	10	24.4	7.4	5.5	420 A A	1389@50
195/60R15	88H	10	24.2	7.9	6	420 A A	1235@44
195/65R15	91H	10	25	7.9	6	420 A A	1356@44
205/60R15	95H XL	10	24.7	8.2	6	420 A A	1521@50
205/65R15	94H	10	25.5	8.2	6	420 A A	1477@44
205/70R15	96T	10	26.3	8.2	6	420 A A	1565@44
215/70R15	98T	10	26.9	8.7	6.5	420 A A	1653@44
195/50R16	84V	10	23.7	7.9	6	420 A A	1102@44
195/55R16	87H	10	24.4	7.9	6	420 A A	1201@44
205/50R16	87H	10	24.1	8.4	6.5	420 A A	1201@44
205/55R16	91H	10	24.9	8.4	6.5	420 A A	1356@44
205/60R16	92H	10	25.7	8.2	6	420 A A	1389@44
205/65R16	95H	10	26.5	8.2	6	420 A A	1521@44
215/55R16	97H XL	10	25.3	8.9	7	420 A A	1609@50
215/60R16	95H	10	26.1	8.7	6.5	420 A A	1521@44
215/65R16	98T	10	27	8.7	6.5	420 A A	1653@44
225/60R16	98H	10	26.6	9	6.5	420 A A	1653@44
225/65R16	100H	10	27.5	9	6.5	420 A A	1764@44
235/60R16	100V	10	27.1	9.4	7	420 A A	1764@44
235/65R16	103T	10	28	9.4	7	420 A A	1929@44
205/50R17	89V	10	25.1	8.4	6.5	420 A A	1728@44
215/45R17	87W	10	24.6	8.4	7	420 A A	1201@44
215/50R17	91V	10	25.5	8.9	7	420 A A	1356@44
215/55R17	94V	10	26.3	8.9	7	420 A A	1477@44
215/60R17	96T	10	27.2	8.7	6.5	420 A A	1565@44
215/65R17	99T	10	28	8.7	6.5	420 A A	1709@44
225/45R17	91V	10	25	8.9	7.5	420 A A	1356@44
225/50R17	94V	10	25.9	9.2	7	420 A A	1477@44
225/55R17	97V	10	26.8	9.2	7	420 A A	1609@44
225/60R17	99H	10	27.6	9	6.5	420 A A	1709@44
225/65R17	102T	10	28.5	9	6.5	420 A A	1874@44
235/45R17	97W XL	10	25.4	9.3	8	420 A A	1609@50
235/55R17	99V	10	27.2	9.6	7.5	420 A A	1709@44
225/40R18	92W XL	10	25.1	9.1	8	420 A A	1389@50
225/50R18	95H	10	26.9	9.2	7	420 A A	1521@44
235/45R18	94V	10	26.3	9.3	8	420 A A	1477@44
235/50R18	97V	10	27.3	9.6	7.5	420 A A	1609@44
235/55R18	100V	10	28.1	9.6	7.5	420 A A	1764@44
235/60R18	103H	10	29.1	9.4	7	420 A A	1929@44
245/40R18	97W XL	10	25.7	9.8	8.5	420 A A	1609@50
245/45R18	100W XL	10	26.7	9.6	8	420 A A	1764@50
235/55R19	105V XL	10	29.2	9.6	7.5	420 A A	2039@50

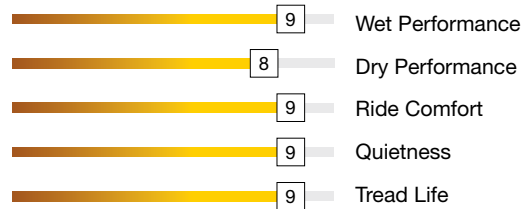

60,000 Mile Limited Treadwear Warranty

The ULTRAMAX A/S 2.0 is an exceptional all-season tire with the perfect balance of comfort and performance. Full-size offering with needed speed ratings from T to W for today's vehicles. Its design features four broad circumferential grooves, ensuring excellent wet traction. The wide footprint and notched center rib enhance stability and traction. ULTRAMAX A/S 2.0 guarantees both comfort and performance, coupled with a 60,000-mile tread life, ensuring peace of mind in all seasons.

TIRE FEATURES

- **BALANCED VARIABLE PITCH TREAD DESIGN:** Reduces road noise and assures a quiet comfortable cabin.
- **FULL-SIPED INNER TREAD BLOCKS:** Efficient water evacuation design promotes enhanced wet performance.
- **CENTER RIB WITH ANGLED SIPES:** Enhances traction while improving straight-line stability.

